



CATEGORY:

CLEARED

ADDRESS
CONTACT IF FOUND:



11/26/99

JCS35 U.S. PTO

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 35.C14040

First Named Inventor or Application Identifier

AKIHIKO SATO

Express Mail Label No.

JCS35 U.S. PTO

09/449738

11/26/99

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 202311. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☒ Specification Total Pages 603. ☒ Drawing(s) (35 USC 113) Total Sheets 214. ☒ Oath or Declaration Total Pages 1a. ☐ Newly executed (original or copy)b. ☒ Unexecuted for information purposesc. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]i. ☐ **DELETION OF INVENTOR(S)**Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of the
oath or declaration is supplied under Box 4c, is considered as being
part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.6. ☐ Microfiche Computer Program (Appendix)7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)a. ☐ Computer Readable Copyb. ☐ Paper Copy (identical to computer copy)c. ☐ Statement verifying identity of above copies**ACCOMPANYING APPLICATION PARTS**8. ☐ Assignment Papers (cover sheet & document(s))9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)10. ☐ English Translation Document (if applicable)11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS
Citations12. ☒ Preliminary Amendment13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____**18. CORRESPONDENCE ADDRESS**☒ Customer Number or Bar Code Label 05514 or ☐ Correspondence address below
(Insert Customer No. or Attach bar code label here)

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

+

| CLAIMS | (1) FOR | (2) NUMBER FILED | (3) NUMBER EXTRA | (4) RATE | (5) CALCULATIONS |
|--------|--|------------------|------------------|-------------------------------|------------------|
| | TOTAL CLAIMS (37 CFR 1.16(c)) | 19-20 = | 0 | X \$ 18.00 = | \$ 0 |
| | INDEPENDENT CLAIMS (37 cfr 1.16(b)) | 4-3 = | 1 | X \$ 78.00 = | \$ 78.00 |
| | MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d)) | | | \$ 260.00 = | \$ 0 |
| | | | | BASIC FEE (37 CFR 1.16(a)) | \$760.00 |
| | Total of above Calculations = | | | | \$838.00 |
| | Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28). | | | | |
| | TOTAL = | | | | \$838.00 |

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$838.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

| | |
|-----------|---|
| NAME | Steven W. Stewart - Reg. No. 45,133 |
| SIGNATURE |  |
| DATE | November 26, 1999 |

SWS\smj

35.C14040

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

| | | |
|-----------------------------|---|----------------------------|
| In re Application of: |) | |
| | : | Examiner: UNASSIGNED |
| AKIHIKO SATO |) | |
| | : | Group Art Unit: UNASSIGNED |
| Application No.: UNASSIGNED |) | |
| (currently herewith) | : | |
| |) | |
| Filed: November 26, 1999 | : | |
| |) | |
| For: IMAGE PROCESSING | : | |
| APPARATUS, DATA |) | |
| PROCESSING METHOD, | : | |
| AND STORAGE MEDIUM |) | November 26, 1999 |

Assistant Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Prior to issuance of a first Office Action, please further amend the above-captioned patent application as follows:

IN THE SPECIFICATION:

PAGE 5

Line 8, after "respectively" insert --show a--.

IN THE CLAIMS:

Please amend Claim 6 as follows:

6. (Amended) The image processing apparatus according to Claim 1, which [farther] further comprises identifying means for identifying a password embedded in said image data, wherein said control means permits the print of an image which corresponds to said image data when the same password as said password is [input] inputted.


REMARKS

The specification and Claim 6 has been amended to correct minor informalities therein.

Favorable consideration and early passage to issue are respectfully requested.

Applicant's undersigned attorney may be reached in our Washington, D.C. office by telephone at (202) 530-1010. All correspondence should continue to be directed to our below listed address.

Respectfully submitted,



Attorney for Applicants
Steven W. Stewart
Registration No. 45,133

FITZPATRICK, CELLA, HARPER & SCINTO
30 Rockefeller Plaza
New York, New York 10112-3801
Facsimile: (212) 218-2200

SWS/smj

IMAGE PROCESSING APPARATUS,
DATA PROCESSING METHOD, AND STORAGE MEDIUM

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates to an image processing apparatus, a data processing method, and a storage medium.

Related Background Art

10 There has been no conventional means to prevent production given in digital information from being copied illegally or no means established to essentially protect production. For example, a conventional image processing system which comprises a print controller
15 which receives image data coded in a page-description language from a host computer and converts the data into raster image data and then sends it to an image forming device and the image forming device which forms images based on the image data thus sent from the print
20 controller has no means to recognize image data sent from the print controller even if it is production, thus being unable to prevent such production from being copied illegally.

In the recent background that has strengthened
25 legal protection of production given in digital information, a technological method is required to legally prevent illegal copying of production by use of

a copying machine, printer, etc.

On the other hand, however, the copyright of some production can be bought from the author to output it with permission from him.

5 Such production needs to be released from its prohibition state of the image data protected (i.e., copy-protected) based on production information, which has not been taken into account. Therefore, there have been such cases that even with permission obtained from
10 the author, his production cannot be output.

Also, there has not been discussed fully about technologies to provide other pieces of production relating to one production based on its information obtained.

15

SUMMARY OF THE INVENTION

In view of the above, it is an object of the present invention to provide an image processing device, a data processing method, and a storage medium
20 that have solved the above-mentioned problems.

Another object of the present invention is to provide such an image processing device that can appropriately process production and a method for processing data as well as a storage medium for this
25 purpose.

An appropriate example of the present invention is written in a claim 1.

Still another object of the present invention is to provide such an image processing apparatus that has a novel function and a data processing method as well as a storage medium for this purpose.

5 The other objects and features of the present invention will be apparent from the following description on the embodiment with reference to the appended drawings.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows outer appearances of a configuration of an image processing system according to one embodiment of the present invention;

15 Fig. 2 is a cross-sectional view of a configuration of an image processing device shown in Fig. 1;

Fig. 3 is a block diagram of a configuration of an image processing unit shown in Fig. 2;

20 Fig. 4 is a property graph of one example of a gradation correction property of an input/output signal at a reader gradation correcting circuit shown in Fig. 3;

25 Fig. 5 is a property graph of one example of an input/output signal at an engine gradation correcting circuit;

Fig. 6 is a flowchart illustrating one example of a first image data processing procedure;

Figs. 7A, 7B, 7C, 7D and 7E show examples of a mark and a character string which indicate being production;

5 Figs. 8A and 8B show examples of a warning screen displayed at a display portion of an operating unit of a host computer or an image processing device;

Fig. 9 is a flowchart illustrating one example of a second image data processing procedure;

10 Fig. 10 is a flowchart illustrating one example of a third image data processing procedure;

Fig. 11 is a flowchart illustrating one example of a fourth image data processing procedure;

15 Fig. 12 is a flowchart illustrating image data processing at a printer controller according to a fifth embodiment;

Figs. 13A and 13B respectively show examples of a password input screen and a password-mismatch warning screen which are displayed on the host computer in image data processing;

20 Figs. 14A, 14B, 14C, 14D and 14E illustrate examples of a mark and a character string which indicate being production;

Fig. 15 shows an configuration of an image forming system according to a sixth embodiment;

25 Fig. 16 is a flowchart illustrating image data processing at a printer controller in the image forming system shown in Fig. 6;

Fig. 17 is a flowchart illustrating image data processing at the printer controller in a seventh embodiment;

5 Fig. 18 shows a warning screen for confirming acceptance of accounting of production in the image data processing according to the seventh embodiment of Fig. 7;

10 Figs. 19A and 19B respectively screen for displaying production-use information for confirming accounting information of production in the image data processing according to the seventh embodiment of Fig. 7;

Fig. 20 shows a configuration of an eighth embodiment of the present invention;

15 Fig. 21 is a flowchart for the eighth embodiment;

Fig. 22 shows a display example of the eighth embodiment; and

Fig. 23 is another display example of the eighth embodiment.

20

DESCRIPTION OF THE PREFERRED EMBODIMENTS

First embodiment

25 Fig. 1 shows outer appearances of a configuration of an image processing system according to one embodiment of the present invention.

In the figure, a reference numeral 101 indicates a host computer and a numeral 102 indicates a print

controller (i.e., controller). A numeral 103 indicates an image forming device (i.e., printer), which color-copies a manuscript mounted on a manuscript station and also outputs images sent from a host computer 101 via the print controller.

The host computer 101 converts image data into information coded in the page description language (PDL) and then sends it via a connecting cable to the print controller 102.

The print controller 102 then translates PDL data sent from the host computer 101 and executes raster image processing to convert the PDL data into raster image data, which is subsequently sent via the connecting cable to an image forming device 103 to provide the corresponding images.

Fig. 2 is a cross-sectional view of a configuration of the image processing device 103 shown in Fig. 1, which comprises: a digital-color image reader unit (hereafter called reader unit) 201 at its top; a printer engine unit (hereinafter called engine unit) 202; and an image processing unit 203 set between the reader unit 201 and the engine unit 202.

The following will describe the configuration of the image forming device 103 and the operations of copying manuscript images as a copying machine.

In the figure, when a manuscript is mounted on a manuscript station glass surface 31 and a copy start is

executed, illumination is reciprocated in a predetermined direction to collect a light reflected on the manuscript at a full-color sensor 34 formed integrally with an RGB three-color resolving filter through a lens 33 via mirrors 32a, 32b, and 32c, to obtain a color-resolving image analog signal. The color-resolving image analog signal is digitized at an amplifier circuit (not shown) and processed at an image processing unit and then sent to the engine unit 202.

10 A numeral 205 indicates an operating unit, which is provided with a display unit and various keys (neither of which is shown), to give various settings and instructions to the image forming device 103.

At the engine unit 202, an image-carrying photosensitive drum 1 is carried rotationally in an arrow direction, around which are arranged a pre-exposure lamp 11, a corona charger 2, a laser-exposure optical system 3, a potential sensor 12, four developers (yellow developer 4Y, cyan developer 4C, magenta developer 4M, black developer 4K), a drum-mounted light-quantity detecting sensor 13, a transfer device 5, and a cleaner 6.

15
20

In the laser-exposure optical system, an image signal from the reader unit 201 is converted at a laser-output unit (not shown) into a light signal, so that thus converted laser light is reflected on the polygonal mirror 3a and passes through the lens 3b and

25

the mirror 3c to be projected onto the surface of the photosensitive drum 1.

When an image is formed by the engine unit 202, the photosensitive drum is rotated in the arrow
5 direction to discharge the drum surface with the pre-exposure lamp 11 and then charge it uniformly with the corona charger 2, in order to subsequently illuminating a light image E for each resolving color so as to form a latent image on the photosensitive drum 1.

10 Next, the predetermined developers (4Y, 4M, 4C, and 4K) are operated to develop the latent image on the photosensitive drum 1, thus forming a toner image having resin as its base, on the photosensitive drum 1. These developers (4Y, 4M, 4C, and 4K) are each caused
15 by eccentric cams 24Y, 24C, 24M, and 24K respectively to approach the photosensitive drum 1 for each resolving color.

Next, the toner image developed on the photosensitive drum 1 passes through a recording-
20 material cassette 7a and an intermediate tray 22 or recording-material trays 7b and 7c and then detection/conveying systems 50-52 and a transfer device 5 and then is transferred onto a recording material 7 (7a, 7b, and 7c) supplied at a position opposing the
25 photosensitive drum 1.

In this embodiment also, the transfer device 5 comprises a transfer drum 5a given as a

recording-material holding means, a transfer charger
5b, a sucking roller 5g opposing an absorbing charger
5c for electro-statistically sucking the recording
material 7, an internal charger 5d, an outside charger
5e, and a cam-follower 5i, in such a configuration that
a recording-material carrying sheet 5f made of a
dielectric is extended and integrally formed in a
peripheral opening region of the transfer drum 5a
axially supported so as to be driven rotationally. The
recording-material carrying sheet 5f comes in a
dielectric sheet (hereinafter called transfer sheet)
made of a polycarbonate film etc.

As the transfer drum 5a is rotated, the toner
image on the photosensitive drum 1 is transferred onto
the recording material 7 carried on the recording-
material carrying sheet 5f.

Thus, on the recording material 7 which is sucked
and conveyed by the recording-material carrying sheet
5f, a desired color image is transferred to form a
full-color image.

In the case of forming a full-color image, the
recording material 7 on which a four-color toner image
has transferred is separated from the transfer drum 5a
by a separation claw 8a and then from the transfer
sheet 5f by a separating-and-lifting roller 8b and a
separating charger 5h and then ejected from a tray 10
via a thermal roller fixing device (hereinafter called

fixing device).

Also, the photosensitive drum 1 after completion of transfer is cleaned of residual surface toner with the cleaner 6 and then sent to the image forming step again.

At the fixing device 9, a reference numeral 9g indicates a conveyor belt, which conveys to the fixing device 9 the recording material 7 separated from the transfer device 5. Numerals 9e and 9f indicate heaters, which heat an upper roller 9a and an lower roller 9b.

When an image is formed on the surface of a recording material 7, on the other hand, the recording material 7 is provided with an image formed on its one surface is ejected from the fixing device 9 and, immediately after that, a conveying-path switching guide 29 is driven to cause the recording material 7 to pass through a conveying path 20 and be introduced once onto a reversing path 21a, and when a reversing roller 21b rotates in a reverse direction, the recording material 7 is taken out starting from its rear end and thus taken in last, in a direction opposite to that it has been taken in. Then, the above-mentioned image forming step is executed again, to form an image on the other surface.

Also, to prevent the scattering and sticking of a fine particle on the recording-material carrying sheet

5f of the transfer drum 5 and the sticking of oil on the recording material 7, they are cleaned by using a fur brush 14 and a backup fur brush opposing each other via the recording-material carrying sheet 5f, an oil-cleaning roller 16 and an oil-cleaning backup brush 17 opposing each other via the recording-material carrying sheet 5f, or a polishing roller 18 and a polishing roller backup brush 19 opposing each other via the recording-material carrying sheet 5f. Such cleaning is carried out before or after image formation and every time when jamming (of paper) occurred. Also, in the configuration of this embodiment, the eccentric cam 25 is operated at desired timing to work the cam follower 51 formed integrally with the transfer drum 5a, thus making it possible to arbitrarily set a gap between the recording-material carrying sheet 5f and the photosensitive drum 1. For example, at the standby or power-off, the gap is enlarged between the transfer drum 5a and the photosensitive drum 1.

Fig. 3 is a block diagram of a configuration of the image processing unit shown in Fig. 2.

In the figure, a reference numeral 301 indicates a CCD reading unit, which comprises an amplifier for amplifying each of analog RGB signals input from the CCD34 shown in Fig. 2, an A/D converter for converting the analog RGB signals into for example 8-bit digital signals, and a shading correcting circuit for

correcting known shading, etc., thus outputting digital RGB signals of a manuscript image.

5 A numeral 302 indicates a shift memory, which corrects a shift for example between colors and picture elements of an RGB image signal input from the CCD reading unit in response to a shift-quantity control signal sent from the reader controller 120. A numeral 303 indicates a complementary-color converting circuit, which converts an RGB image signal input from the shift
10 memory 302 into an MCY image signal. A numeral 304 indicates a black-extracting circuit, which responds to a black-extracting signal input from the reader controller 120, to extract a black region of an image from MCY (magenta, cyan, and yellow) image signals
15 input from the complementary-color converting circuit 303 and then output a K (black) image signal for thus extracted black region.

20 A numeral 305 indicates a UCR circuit, which responds to the K image signal input from the black-extracting circuit 304 and the UCR-quantity control signal input from the reader controller 120, to execute under-color removing (UCR) processing on the MCY image signal input from the complementary-color converting circuit 303. That is, the black-extracting circuit 304
25 and the UCR circuit 305 do not superpose thus extracted black region onto 3-color (M, C, and Y) toner but replace it with K toner, thus improving the color

reproduction performance.

The K image signal output from the black-extracting circuit 304 is given as: $K = A \times \min(C2, Y2, M2)$.

5 Where, A indicates a black-extracting coefficient and C2, Y2, and M2 respectively indicate M, C, and Y image signals output from the complementary-color converting circuit 303. The black-extracting coefficient A is determined by the black-extracting
10 quantity control signal specified by the reader controller 120.

MCY image signals (M1, C1, Y1) output from the UCR circuit 305 are determined as: $M1 = B1 \times (M2 - D1 \times K)$, $C1 = B2 \times (C2 - D2 \times K)$, and $Y1 = B3 \times (Y2 - D3 \times K)$.

15 Note here that M2, C2, and Y2 represent MCY signals output from the complementary-color converting circuit 303, and coefficients B1, B2, B3, D1, D2, and D3 are determined by the UCR-quantity control signal from the reader controller 120.

20 Next, a numeral 306 indicates a masking circuit, which executes masking processing on MCY image signals input from the UCR circuit 305 in response to a masking-coefficient control signal input from the reader controller 120, to remove turbidity of the toner
25 used and correct the RGB filter properties of the CCD. The MCY image signals (M0, C0, Y0) output from the masking circuit 306 are expressed as follows:

(Matrix 1)

$$\begin{pmatrix} M0 \\ C0 \\ Y0 \end{pmatrix} = \begin{pmatrix} a11 & a12 & a13 \\ a21 & a22 & a23 \\ a31 & a32 & a33 \end{pmatrix} \begin{pmatrix} M1 \\ C1 \\ Y1 \end{pmatrix}$$

where a11 through a33 indicate masking coefficients,
which are determined by the masking-coefficient control
5 signal specified by the reader controller 120; and M1,
C1, and Y1 indicate MCY image signals output from the
UCR circuit 305.

A numeral 307 indicates a selector, which selects
a one-color image signal, and outputs an image signal
10 V1, of the M, C, Y, and K image signals input from the
masking circuit 306 and the black-extracting circuit
304 in response to the color-selecting signal input
from the reader controller to a selecting terminal S
and the M, C, Y, and K image signals input from the
15 print controller 102 via an external interface (I/F)
circuit 308.

A numeral 309 indicates a reader-gradation
correcting circuit, which executes such gradation
correction as shown in Fig. 4 on an image signal V1
20 input from the selector 307 and then outputs an image
signal V2. For example, the reader-gradation
correcting circuit 309 executes color-density
correction using either one of the conversion
properties a through e (described later with reference
25 to Fig. 4) which are selected based on a

gradation-correction selecting signal specified by the reader controller 120. The setting by this reader-gradation correcting circuit 309 is determined by the setting of image color-density by the copying-machine operating unit.

A numeral 310 indicates a gradation correcting circuit, which corrects an image signal by selecting either one of the gamma-conversion properties M, C, Y, and K (described later with reference to Fig. 5) according to an engine-color selecting signal input from an engine controller 110, to linearize the output property of an engine unit 202 for each color.

A numeral 311 indicates a laser driver, which is included in the laser-exposure optical system 3. The laser driver 311 modulation-drives a semiconductor laser based on an image signal V3 input from the engine-gradation correcting circuit 310, to form a latent image on the photosensitive drum 1.

Also, the image processing unit 203 comprises a CPU, ROMs, and RAMs (none of which is shown), to cause the CPU to govern the entire image processing unit 203 based on a program stored in the ROMs. The RAMs here are used as a work region for the CPU.

In the print controller 102, a CPU indicated by a numeral 104 governs the entire print controller 102 based on a program stored in a memory 106 or a storage medium (not shown). A numeral 105 indicates a

detecting circuit, which executes copyright-information
detecting processing describe later and outputs an
image-output prohibition signal. Also, the memory 106
is used as a work region for the CPU 104 and as a
5 storage region for image data transferred by the host
computer 101 and the image-output prohibition signal
output from the detecting circuit 105.

The following will describe the operations of the
system including the print controller 102.

10 Expansion of PDL data refers to an operation of
expanding PDL data to a full-color image by use of the
host computer 101 and then writing it into the memory
106 of the print controller 102. This full-color image
is stored, in agreement with the image forming device
15 103, into the memory 106 as image data which is color-
resolved into four colors of M, C, Y, and K. Note here
that this memory 106 stores also the image-output
prohibition signal detected at the detecting circuit
105 which executes copyright-information detecting
20 processing which is described later. The image-output
prohibition signal is read out together with image data
resolved into four colors from the memory 106 and sent
to the image forming device 103.

If, in this case, the image-output prohibition
25 signal is not generated, image data sent to the image
forming device is printed out, during which a full-
color image stored in the memory 106 is read out in

synchronization with the rotation of the photosensitive drum 1 and then sent to the laser driver 311. These operations are controlled by the CPU 104 of the print controller 102.

5 Fig. 4 shows one example of the gradation-correction property of an input/output signal at the reader-gradation correcting circuit 309, in which the horizontal axis corresponds to the input signal (input data) and the vertical axis, to the output signal
10 (output data).

 Fig. 5 shows one example of the gradation-correcting property of an input/output signal at the engine-gradation correcting circuit 310, in which the horizontal axis corresponds to the input signal (input
15 data) and the vertical axis, to the output signal (output data).

 The following will describe the operation of processing PDL data at the print controller 102.

 Fig. 6 is a flowchart illustrating one example³ of
20 the first image-data processing procedure in an image processing system according to this embodiment, which corresponds to the PDL data processing at the print controller 102. Numerals 1 to 9 indicate the step numbers.

25 First, the system receives one unit of PDL data from the host computer 101 (step 1). This one unit may be a few byte, one page, or one line as far as it fits

to the processing. Then, the system executes raster
image processing (expansion) on thus received PDL data
and then writes it into the memory 106 (step 2). Next,
the system checks whether data processing (reception
5 and expansion) of one page of the PDL data has been
completed (step 3) and, if it decides it is not
completed yet, returns to step 1.

If, on the other hand, it decides it is completed,
the system detects production information, i.e. detects
10 whether the production information is contained in the
image data which has undergone raster image processing
(step 4).

This detection processing for production
information, as described later, recognizes the
15 production information by detecting the data of a mark,
if any, attached to the image of the production which
indicates its copyright.

Next, the system checks the results of detecting
the production information given at step (4) (step 5)
20 and, if it decides that the production information has
been detected, it does not send the image data to the
image forming device 103 but warns by display to the
host computer 101 or the operating unit 250 to the
effect that it cannot output the image data specified
25 for printout because the it is production (see later-
described Fig. 8A) and stops image output (step 9) to
finish the processing. In this case, the image data is

not sent to the image forming device 103 but the processing is all finished in the print controller 102.

At step 5, on the other hand, if it is decided that at step 4 no production information has been
5 detected in the image data at the time of production-information detection processing, the system, along an ordinary flow of image processing, reads out the RGB raster image data stored in the memory 106 and executes logarithmic conversion to convert the RGB image data
10 into MCYK image data (step 6).

Next, the system sends thus converted MCYK image data to the image forming device 103 (step 7), to finish image processing of one page of data for the print controller 102.

15 Next, the system, according to the above-mentioned image forming procedure, forms an image on a recording medium based on the image data sent from the print controller 102 and outputs thus formed image (step 8), to finish a series of image forming processes.

20 The above processing prevents digital-information version of production from being copied illegally.

The following will describe detection processing for production information.

Figs. 7A to 7E show one example of a mark and a
25 character string which indicate that the image data is production.

Figs. 7A to 7C show one example of a mark which

indicates that the image data is production; Fig. 7D shows one example of a bar code which indicates that it is production; and Fig. 7E shows one example of a character string which indicates that it is production, so that an image having any one of these shown by Figs. 7A to 7E is accepted as production.

[Detection processing for production information]

In it premised here that an image with copyright has any certifying means indicative of production so that image data with copyright which has undergone raster image processing may be detected.

For example, as shown in Figs. 7A to 7D, a mark or bar code indicative of production is determined and registered beforehand.

In this case, image data such as these production mark or bar code may be stored beforehand in the memory 106 of the print controller 102, so that the detecting circuit 105 would execute pattern matching between this data and the above-mentioned raster-information processed data, thus detecting the concerned mark.

Alternatively, in place of using such a symbol as a mark or bar code, as shown in Fig. 7E, by providing production with a character string which indicates "production copy unauthorized" for example "This image is production so cannot be copied" beforehand, the detecting circuit 105 may execute block selection on one page of the above-mentioned raster-image processed

image data, to subsequently extract the character string data and recognize the concerned character string using a character recognizing means, thus detecting that the image data is production to detect the concerned character string. In this case also, a sample of a character string to be detected is stored beforehand in the memory 106 in the print controller 102.

Further alternatively, in place of such character string as shown in Fig. 7E, an ID number indicative of an image with copyright is predetermined so that the detecting circuit 105 may extract character string data with that ID number to recognize the concerned character string using a character recognizing means, thus detecting that the image is production. In this case also, the ID number to be detected is stored beforehand in the memory 106 in the print controller 102.

Also, there are some cases where, as mentioned above, it is desired to avoid adding an extra visible image such as a mark or character to an image with copyright. In such a case, such a technique may be considered that production information may be masked by embedding some add-on information of a certain predetermined pattern of a few dots expressed for example in a yellow color almost invisible to the human eyes into an image with copyright. In this case also,

such a method may be considered that this add-on information is stored beforehand in the memory 106 so that the concerned image is detected to be production by detecting the color and the add-on pattern.

5 Still further alternatively, to mask production information, for image data of each picture element, a few high-order bits starting from the LSB (least significant bit) may be used as a recognizing means. In this case, the production information can be
10 subdivided for each picture element, thus making it possible to recognize image data of interest in such a way that its only one portion is an image with copyright and the remaining does not have copyright. Therefore, as mentioned above, only the portion of
15 image without copyright of one page of image data can be output, thus preventing such portions as decided to have copyright from being output.

 Also, by forming a pattern by using this few bit data for each picture element as a total one page to
20 recognize image with copyright, a production-copy-prohibiting mark etc. can be masked as something like a watermark into each one page of image data. In this case, such a method may be considered that production-recognizing bits for each picture element may be
25 extracted to constitute one page of image data and then execute pattern matching on such production marks as shown in Fig. 7A to 7D, thus detecting that the data is

production.

Note here that the method for detecting mage data of production is not limited to the above-mentioned example but may be any as far as it scan detect that
5 the data of interest is production.

Figs. 8A and 8B show one example of a warning screen displayed on the display unit of the host computer 101 or the display unit of the operating unit 250 of the image processing device 103 .

10 In Fig 8A corresponds to warning display to the effect that image data specified to be printed out cannot be output (i.e., printed out) because it is production, while Fig. 8B corresponds to warning display that image data specified to be printed out
15 could not be output (i.e., printed out) because it is production.

[Second embodiment]

Although the above first embodiment has been described in such a case of performing prohibition and
20 suspension of image output all at the print controller 102, such a configuration may be given that the print controller 102 itself may decide whether image data should be prohibited from being output and send the information to the image forming device 103, thus
25 causing it to stop image output. The following will describe this embodiment.

Processing of PDL data at the print controller 102

and the image forming device 103 is described with reference to a flowchart shown in Fig. 9.

Fig. 9 shows one example of a second image-data processing procedure, corresponding to the PDL data processing executed at the print controller 102 and the image forming device 103. Note here that numerals 1 to 12 indicate relevant step numbers.

Description of steps 1 to 5 for receiving PDL data from the host computer 101 and detecting production information in image data which has undergone raster image processing is omitted here because they are the same as those of a procedure indicated by steps 1 to 5 of the above-mentioned flowchart shown in Fig. 6.

At step 5, the system checks the results of detecting the production information given at step (4) and, if it has decided that it has detected production information, it reads out RGB raster image data stored in the memory 106 and then performs logarithmic conversion to convert it into MCYK image data (step 7), in order to create an image-output prohibition signal and add it to the above-mentioned MCYK image data, causing control to go to step 9.

If, on the other hand, it decides that no production information has been detected in image data by the detection processing of the production information given at step 4, the system similarly reads out RGB raster data stored in the memory 106 and then

performs logarithmic conversion to convert the RGB image data into MCYK image data (step 6), causing control to go to step (9).

5 Next, at step (9), the system sends the MCYK image data to the image forming device 103.

10 Next, the image forming device 103 checks whether the image data sent from the printer controller 102 is provided with the image-output prohibition signal (step 10) and, if it decides that the image-output prohibition signal has been added, it forms an image on a recording medium and outputs it (step 11), thus finishing a series of image forming processes.

15 If it decides that the image-output prohibition signal has been added to the image data sent from the printer controller 102, the system gives the host computer 101 or the operating unit 250 warning display to the effect that image data specified to be printed out cannot be output because it is production (see later-described Fig. 8A) and also, to prohibit the image data being output, converts the image data all into a blank image and outputs it (step 12), thus finishing its processing.

20 The above processing is able to prohibit digitized production from being copied illegally.

25 [Third embodiment]

 This embodiment is described in a case of one example of data processing for embedding production

information into image data to mask it, particularly in a case of detecting an inconspicuous or invisible digital watermark indicative of production in order to detect production information. This embodiment is specifically described in such a case that a digital watermark indicative of production constitutes a production mark as image data for the entire one page.

The following will describe operations, with reference to a flowchart shown in Fig. 10, of processing PDL data at the print controller 102 and the image forming device 103.

Fig. 10 is a flowchart illustrating one example of a third image-data processing procedure, corresponding to the PDL data processing at the print controller 102 and the image forming device 103. Note here that numerals 1 to 12 indicate the step numbers.

Description of steps 1 to 3 for receiving PDL data from the host computer 101 for raster image expansion is omitted here because they are the same as the above-mentioned processing procedure of steps 1 to 3 of the flowchart shown in Fig. 6.

At step 4, the system checks, as follows, image data which has been raster image processing to detect production information therein. First, the system extracts the low-order three bits starting from the LSB for each picture element to create a digital-watermark signal which is a property signal. The system uses

this digital-watermark signal as one page of data to
create digital-watermark information and image data, so
that it may perform pattern matching to search this
watermark information for a mark such as for example
5 those shown in Figs. 7A to 7C, thus detecting the
production information.

Next, the system checks the results of detecting
the production information given at step 4 (step 5) and,
if it decides that the production information has been
10 detected, it reads out RGB raster image data stored in
the memory 106 and then performs logarithmic conversion
to convert the RGB image data into MCYK image data and
also converts the image data, to prohibit its output,
into a blank image (step 7) to create an image-output
15 prohibition signal and add it to the image data (step
8), thus causing control to go to step 9.

If, on the other hand, it decides that the
production information has not been detected in the
image data by the detecting processing for the
20 production information at step 5, the system reads out
RGB raster image data stored in the memory 106 and then
performs logarithmic conversion to convert the RGB
image data into MCYK image data (step 6), thus causing
control to go to step 9.

25 At step 9, the system sends thus converted MCYK
image data to the image forming device 103, which then
forms an image on a recording medium and outputs it

(step 10).

Next, the image forming device 103 checks whether the image-output prohibition signal is added to the image data sent from the print controller 102 (step 11) and, if it decides that the output prohibition signal has not been added to the image data, it finishes a series of image forming processes.

If, on the other hand, it decides that the image-output prohibition signal has been added to the image data, it sends, to the host computer 101 or the operating unit 250, warning display (see Fig. 8B) to the effect that the image data specified to be printed out cannot be output because it is production, thus finishing a series of image forming processes.

Although the flowchart shown in Fig. 10 has been described in a case of converting image data into a blank image in the print controller 102, such a configuration may be employed that if the image-output prohibition signal is detected in the image processing device 103, the image data may be converted, in order not to be output, into a blank image and output as formed.

The above processing makes it possible to use a production mark in which a digital watermark is constituted as image data of the entire one page, to detect a production image whose production information is embedded into the image data to mask it so as to

prohibit the outputting of the one page of image data of the production, thus preventing digitized production images from being copied illegally without adding an extra visible image such as a mark or character to the production image.

[Fourth embodiment]

Although the above third embodiment has been described in a case where a digital watermark indicative of production constitutes a production mark as an entire one page of image data, such a configuration may be employed that the digital watermark indicative of production corresponds to each picture element. The following will describe this embodiment.

The following will specifically describe operations of PDL data processing at the print controller 102 and the image forming device 103 with reference to a flowchart shown in Fig. 11.

Fig. 11 is a flowchart illustrating one example of a fourth image-data processing procedure, corresponding to the PSL data processing at the print controller 102 and the image forming device 103. Note here that numerals 1 to 13 indicate the step numbers.

Description of steps 1 to 3 for receiving PDL data from the host computer for raster image expansion is omitted here because they are the same as the above-mentioned steps 1 to 3 for processing procedure

of the flowchart shown in Fig. 6.

At step 4, the system detects checks, as follows, image data which has undergone raster image processing to detect production information therein. First, the
5 system extracts the low-order three bits starting from the LSB of each picture element to create a digital watermark signal, which is a property signal for each picture element, and image data. Using this digital watermark signal, the system performs pattern matching
10 on predetermined production data, thus detecting production information about each picture element.

Next, the system checks the results of detecting the production information given at step 4 (step 5) and, if it decides that the production information has
15 been detected for any picture element in the image data, it creates an image-output prohibition signal indicative of image-output-prohibited data (step 7) and reads out RGB raster image data stored in the memory
106 and then performs logarithmic conversion to convert
20 the RGB image data into MCYK image data (step 8) and then converts only such image data as detected to be production into a blank image to prohibit outputting of such portions of image data (picture elements) to be
25 detected to be production (step 9), thus causing control to go to step 10.

If, on the other hand, it decides at step 5 that the production information has been detected in none of

the picture elements in the image data as a result of detecting the production information given at step 4, the system reads out RGB raster image data stored in the memory 106 and then performs logarithmic conversion to convert the RGB data into MCYK image data (step 6), thus causing control to go to step 10.

At step 10, the system sends thus converted MCYK image data to the image forming device 103, which then forms an image on a recording medium and outputs it (step 11).

Next, the image forming device 103 checks whether the image-output prohibition signal is added to the image data sent from the print controller 102 (step 12) and, if it decides that the image-output prohibition signal has not been added, it finishes a series of image forming processes.

If, on the other hand, it decides that the image-output prohibition signal has been added, the system sends warning display (see Fig. 8B) to the effect that the image data specified to be printed out cannot be output because it is production, to the host computer 101 or the operating unit 250 (step 13), thus finishing a series of image forming processes.

Although the flowchart shown in Fig. 11 has been described in a case of converting image data into a blank image for each picture element in the print controller 102, such a configuration may be employed

that if the image-output prohibition signal for each picture element is detected in the image processing device 103, the concerned picture element would be converted, to prohibit the outputting of its
5 corresponding image data, into a blank image to form an image and output it.

The above processing makes it possible to detect production information (digital watermark) which is embedded corresponding to each picture element so as to
10 prohibit the outputting only of such image data of picture elements corresponding to the production image, thus outputting the information of portions other than the production image without adding an extra visible image such as a mark or character to the production
15 image, to prevent digitized production from being copied illegally.

Although this embodiment has been described about a means of converting an output signal into a blank image as a means of prohibiting the outputting of an
20 image, such a configuration may be employed as using a method for scrambling for example any solid-black pattern image or data other than an original image or changing its magnification before outputting it or printing a message such as "production copy
25 unauthorized".

[Fifth embodiment]

Although the above-mentioned embodiments have

taken a measure to prevent a normal printout when production information was detected, the following embodiment uses such a configuration that full-color data, production information (i.e., image-output prohibition signal), and a password (which is detailed later) are embedded into PDL data received at the print controller 102 so that the image-output prohibition signal and the password may be written into the memory 106 at the detecting circuit 105.

Fig. 12 is a flowchart illustrating the expansion processing of the PDL data by the print controller shown in Fig. 1.

Step S1201:

The system receives PDL data in for each prescribed unit from the host computer 101. The PDL data is received in one or multiple of such a unit as fitting to processing, e.g. units of a few bytes, one page, or one line.

Step S1202:

The system analyzes thus received PDL data and performs raster image processing to convert it into raster image data (i.e., RGB raster image data) and then writes it into the memory 106.

Step S1203:

The system receives each page of the PDL data to decide whether it has undergone expansion processing.

If, as the results of this decision, it is found

that the expansion processing has not been completed
for that one page of the PDL data, control returns to
step S1201 to permits the system to repeat steps S1201
to S1203 again on the PDL data received in prescribed
5 units. When that one page of the PDL data has
completely been expanded, control goes to step S1204.
Step S1204:

The system checks the RGB raster image data
(hereinafter called "image data" simply) obtained by
10 the raster image processing executed at step S1202 to
detect whether that data contains production
information. This detection processing of production
information, which is detailed later, refers to such
processing that detects a mark (i.e., production
15 information) indicative of copyright from image data
subject to processing. In this case, a password, which
is embedded together with the production information,
of the concerned image is also detected.

Step S1205:

20 Based on the results of the detection executed at
step S1204, the system checks whether the production
information has been detected from the mage data, that
is, decides whether the production information has been
added to the image data subject to processing to
25 indicate that the concerned image data is production.

If the results of this check indicate that the
image data is production, control goes to the

processing starting from step S1206 and, if not, goes to the processing starting from step S1212.

Step S1206:

5 If the image data subject to processing is production, it is copy-protected to prohibit the outputting the image.

 Therefore, here first, to check a password given to release the above-mentioned copy-protection, the password-check counter is returned to "0".

10 Step S1207:

 The system causes the host computer 101 to display such a password-entry screen as shown in Fig. 13A, to ask the user to enter the password.

Step 1208:

15 The system compares the user's password entered on the password-entry screen displayed at step S1207 to a password detected by the detection processing executed at step S1204, to decides these two passwords agree with each other.

20 If it is decided that they do not agree, control goes to the processing starting from step S1209 and, if they agree, control goes to the processing starting from step S412.

Step S1209:

25 If the user's password did not agree with the image data's password, the system adds "1" to the password-check counter which has been cleared at step

2025 RELEASE UNDER E.O. 14176

S1206.

Step S1210:

5 The system decides whether, as a result of processing executed at step S1209, the password-check counter indicates a value of "2" or higher. This decision is made to permit the user to enter his password again if he has mistook in entry of the password.

10 If it is decided that the counter value is less than "2", control returns to step S1207, to permit the user to enter his password again. If, on the other hand, the value is "2" or higher, that is, if the user has mistook the entry of his password twice, control goes to step S1211.

15 Step S1211:

20 If the user has mistook the entry of the password twice, the system does not send image data subject to processing to the printer 103. With this, the concerned data is prevent from being output. Instead, the system causes the host computer 101 to display warning such as shown in Fig. 13B to the effect that specified image data cannot be output because disagreement between these two passwords. Then the system finishes the processing.

25 Thus, in this case, the image data is not sent to the printer 103, to finish the processing all in the print controller 102.

Step S1212:

5 If the results of decision at step S405 indicate that the image data subject to processing is not production or those at step S408 indicate that the password of the image data which is production has agreed with the user's password, the system, along an ordinary image processing flow, reads out image data (i.e., RGB raster image data) stored in the memory 106 and then performs logarithmic conversion to convert
10 that data into MCYK image data.

Step S1213:

The system sends the MCYK image data obtained at step S1212 to the printer 103. With this, image processing of one page of image data is finished.

15 Step S1214:

The printer 103 forms an image based on the image data sent from step S1213 on a recording medium according to the above-mentioned mage forming procedure and outputs it.

20 If there is provided a plurality of pages of image data, the system executes processing starting from step S1201 again.

The above-mentioned detecting processing of production information executed at step S1204 is
25 specifically described as follows.

It is premised here that the production image data has some certifying means (i.e., production

information) indicative of production so that it can be decided whether raster-image processed image data is production image data (i.e., image data with copyright).

5 (Certifying means 1)

For example, as shown in Figs. 14A to 14D, a mark or a bar code indicative of production is determined and registered beforehand and the embedded into production image data.

10 In this case, the above-mentioned mark or bar code already registered is stored in the memory 106 in the print controller 102 beforehand. With this, the system performs pattern matching between this stored data and the above-mentioned raster-image processed data to
15 detect the concerned mark, thus deciding whether the image data subject to processing is production.

As for a password for image data of production, on the other hand, in place of a mark and bar code, for example the above-mentioned ID number of the concerned
20 image data (production image) determined beforehand such as shown in Fig. 14E is embedded.

In this case, the system extracts as character-string data the ID number from image data subject to processing in which that ID number is embedded, to
25 recognize the concerned character string by using a character-recognizing means, so as to confirm a password corresponding to that number (because this

password corresponding to the ID number is a sort of data piece encrypted by an crypto-analyzing circuit included in the detecting circuit 105), thus recognizing the password.

5 Note here that only the password data may be used as bar-code data such as shown in Fig. 14D.

(Certifying means 2)

10 If, as mentioned above, in order to avoid adding an extra visible image such as a mark or character to production image data, the production information is masked by for example embedding beforehand a few dots of predetermined pattern of add-on information (expressed in yellow hard to see with the human eyes) into the concerned image data.

15 In this case also, the above-mentioned add-on information is stored in the memory 106 beforehand, to detect the color and the add-on pattern, thus detecting the production and its password.

(Certifying means 3)

20 A few high-order bits starting from the LSB of each picture element of image data are used as a certifying means in order to mask the production information (digital watermark).

25 In this case, since the production information can be subdivided for each picture element, it is possible to recognize only a portion of certain image data as a production image and the remaining as a non-production

image. Therefore, as mentioned later, it is also possible to output only the portion of an non-production image of one page of image data and not to output those portions that have been decided to be production image data.

(Certifying means 4)

By forming a pattern using the above-mentioned few bits of data for each picture element as the entire one page for recognition of production images, a production prohibition mark etc. is embedded as a watermark into one page of image data to mask each image data.

In this case, the system extracts the production the recognizing bit data of each picture element to constitute one page of image data and then perform pattern matching between such a mark and a bar code as shown in Figs. 14A to 14D, thus detecting that it is production.

Note here that the method for detecting production information or a password from image data subject to processing is not limited to the above-mentioned methods described in Certifying means 1-4, so that any method may be used as far as it can detect that concerned image data is production or it can detect a password.

(Sixth embodiment)

This embodiment is applied for example in an image forming system 1500 such as shown in Fig. 15.

This image forming system 500 has a configuration similar to that of the above-mentioned image forming system 100 shown in Fig. 1, except that when an image is prohibited from being output because its production information is detected, this system 500 accesses the author's side host computer 1502 connected to the print controller 1503 over a network, to release that state of image-output prohibition.

Detailed description of the above-mentioned image forming system 1500 shown in Fig. 15 is omitted here because its components operating in a manner similar to those of the above-mentioned image forming system shown in Fig. 1 are indicated by the same reference numerals.

In the image forming system 1500, the above-mentioned author's side host computer (hereinafter called "first host computer") 1502 is connected to the print controller 1503 over a network.

The print controller 1503 transfers the information which identifies production's image data and its password with the first host computer 1502 and also transfers output permission for image data to be output from the printer 103 or production's image data with a general user's host computer (hereinafter called "second host computer").

The host computer 1502, like the above-mentioned host computer 101 shown in Fig. 1, converts image data into information coded in a page description language

(PDL here) and sends it to the print controller 1503 via a connecting cable.

Therefore, the print controller 1503 analyzes PDL data sent from the second host computer and converts it into raster image data and then sends it to the printer 103 via the connecting cable. During this processing, if production information is detected from among that raster image data by the detection processing, the system first obtains acceptance for printout permission from the concerned author's side the first host computer over the network and then sends the image data to the printer 103.

Fig. 16 is a flowchart illustrating the expansion processing for PDL data executed at the print controller 1503.

Detailed description of the above-mentioned flowchart shown in Fig. 16 is omitted here because its like steps are indicated by the same step numbers as those for the flowchart shown in Fig. 12.

Steps S1201-1205:

The system receives PDL data from the second host computer 1501 and then converts it into raster image data, to detect production information and the password based on that image data.

If the results of this detection processing indicate that the concerned image data is production, control goes to processing starting from step S1601.

This processing differs from that in the above-mentioned fifth embodiment.

Step S1601:

5 If the concerned image data is production, to check the password in order to release a copy-protection state, the system causes the second host computer 1501 to display a password-entry screen (see the above-mentioned Fig. 13A), to ask the user to enter the password.

10 Step S1602:

The system sends to the author's side first host computer over the network the user's password entered on the password-entry screen at step S1601 together with the ID number for identifying the corresponding
15 mage data.

Step S1603:

Checking of the password for the ID number of the image data sent at step S1602 is executed in the first host computer.

20 Step S1604:

If as a result of check executed at the first host computer 1502 at step S1603, the password cannot be identified, to prohibit the outputting of the concerned image data, the system does not send that image data to
25 the printer 103 but does it causes the second host computer 1501 to display warning to the effect that the specified image data cannot be output because of

disagreement of the password (see the above-mentioned Fig. 13B). Then, this processing is finished.

Step S1605:

5 If, as a result of check executed by the first host computer at step 1603, the password is identified, the system issues output permission to the second host computer.

10 Then, the above-mentioned steps S1212 to S1214 are executed, to output the concerned image data from the printer 103.

(Seventh embodiment]

15 The above-mentioned sixth embodiment employs such a configuration that to release an output-prohibited state for image data provided when production information was detected from among the image data, the system accesses the author's side first host computer connected with the print controller 1503 over the network to release the image-output-prohibited state.

20 In this seventh embodiment, however, instead of prohibiting the outputting of image data, the system gives (the user of) the second host computer 1501 the warning to the effect that the concerned data is production and then prompts the author's side first host computer 1502 for accepting accounting and then
25 posts the concerned output information to the author's side first host computer 1502 according to the number of printout sheets given by the second host computer

1501 (user) a the printer 103, for automatic
accounting.

For this purpose, expansion of PDL data executed
at the print controller 1503 comes in for example such
5 processing as shown in Fig. 17.

Detailed description of the flowchart shown in
Fig. 17 is omitted here because its like steps are
indicated by the same step numbers as those for the
flowchart shown in Figs. 12 and 16.

10 Steps S1201-S1205:

The system receives PDL data from the second host
computer and then converts it into raster image data,
to detect the production information and password from
among the image data.

15 If the results of this detection processing
indicate that the concerned image data is production,
control goes to processing starting from step S1701.
This processing differs from that of the above-
mentioned fifth and sixth embodiments.

20 Step S1701:

If the concerned image data is production, the
system gives the second host computer 1501 the warning
to the effect that accounting is imposed if for example
such printout as shown in Fig. 18 is executed in order
25 to notifies it of the specified mage data (image to be
printed out) being production.

This warning screen prompts for the execution of

printout of the information (printout information) of image data to be printed out and, at the same time, for acceptance of its automatic posting to the author's side.

5 Step 1702:

The system decides whether a user's instruction given on the warning screen at step 1701 indicates acceptance of accounting and printout of the image data.

10 If the results of this decision indicate user's acceptance for accounting, control goes to the above-mentioned processing starting from step S1212 and, otherwise, goes to step S1703.

Step S1703:

15 If the user does not accept accounting, the system does not send the image data to the printer 103 but stops the outputting of the image data. Then, this processing is finished.

Steps S1212-S1214:

20 If, on the other hand, the user accepts accounting, the system, as mentioned above, sends the image data to the printer 103. With this, the printer 103 prints out the concerned image data (i.e. one page of printout). Then, control goes to step S1704.

25 Step S1704:

This step is executed even when the concerned image data is not production. Therefore, the system decides

whether image data printed out by the printer 103 is production.

Only if the results of this decision indicate that the printed out image data is production, control goes to
5 step S1705 and, otherwise, this processing is finished.

Step S1705:

If the printed out image data is production, the system, for example, causes the user side second host computer 1501 to display output information of the
10 production including accounting information such as shown in Fig. 19B. The system also causes the author's side first computer 1502 to display printout information of the production such as shown in the above-mentioned Fig. 19A. Then, this processing is
15 finished.

(Eighth embodiment)

The seventh embodiment has been described in such a case that the author's side host computer performs accounting, to permit production to be printed out.

20 The eighth embodiment, on the other hand, particularizes, when image data is printed, an author's host computer based on copyright information contained in a form of a digital watermark in the image data, thus making it possible to obtain an image data list
25 relating to the image data to be printed, from this author's side host computer.

Fig. 20 shows a configuration of the eighth

embodiment. Fig. 21 shows a flowchart of the processing by the eighth embodiment.

When it is instructed to print a desired image data file (step S1201), the user side host computer
5 2004 activates its own software for detecting a digital watermark (which may be embedded into the above-mentioned three bits starting from the LSB or superimposed on a particular frequency in the image) (step S2102), thus detecting the digital watermark
10 embedded in the instructed image data file (step S2103).

Note here that if the digital-watermark detecting software has been activated already, step S2102 can be passed.

15 Thus detected digital watermark contains information about the above-mentioned image data desired to be printed and also information of the author's side host computer.

The information about this image data desired to be
20 printed is (1) address information of the author's side host computer which manages the copyright of the other paintings if the above-mentioned desired image data is one painting of his, and (2) address information of a host computer which manages the notes of the other
25 melodies of a composer if that desired image data is the document of one of his, and (3) address information of the author's side host computer which manages the

other books if that desired image data is one of his,
and (4) address information of the author's side host
computer which manages the other photographs of a
photographer if that desired image data is one of the
5 photographs he took.

Next, the digital-watermark detecting software,
based on the information relating to the desired
printout image data which is detected, gives the user
side host computer 2004 on its display the inquiry for
10 whether it wants to obtain images relating to an image
desired to be printed (step S2104).

If the user has replied YES to this inquiry, the
user side host computer 2004 uses the address
information obtained from the detected digital
15 watermark, to access the home page of the author's side
computer 2001 over the Internet (step S2105), thus
obtaining an index (the above-mentioned image data
list) of the charge of the image contents possessed by
the author's computer 2001 as shown in Fig. 23.

20 Note here that the image contents may not be
introduced with their produce names (as shown in Fig.
23) but be displayed as thumb-nail mages (down-sized
images).

The user of the user side host computer 2004
25 selects a desired image from among the above-mentioned
index and the thumb-nail images, to enter the credit
card number and enter a transmission instruction,

thereby causing the author's side host computer 2001 to send the selected image to the user side host computer. Also, the charge for the selected image is accounted to the credit card at the author's side host computer 2001.

Also, if NO is replied at step S2104 or a suspension instruction is given at step S2107, the processing is finished.

The image, when received, is printed by the printer 103.

Although the above-mentioned embodiment separately activates the digital-watermark detecting software, a print driver, when the user side host computer 2004 instructs printing, may be provided with functions of the digital-watermark detecting software and Internet-connecting software so as to execute processing of step 2103 and the subsequent shown in Fig. 21 in response to a printing instruction.

Also, although the above-mentioned embodiment is limited to a case of still images as image contents received from the author's side computer because of its configuration of printing image data at the printer 103, the contents may be reproduced as movies or musical notes by using the image-reproducing decoding software or speech-reproducing decoding software of the user side host computer.

In this case, the system instructs one frame of

image of a movie or an image of the music jacket, to detect a digital watermark for this image, thus executing steps S2105-2108.

Also, although the above-mentioned embodiment has
5 such a configuration so as to receive image contents only from the author's side host computer 2001, when the digital watermark information contains addresses of author's host computers at a plurality of areas (author's side host computers 1, 2, and 3), an index of
10 the image contents and charge may be received from the author's side host computers of the plurality of areas and displayed sequentially at the user side host computer.

Also, if the digital-watermark detecting software
15 takes for its processing execution so long a time (e.g., three seconds or longer) as to inflict some stress on the operator, the system may execute step S2104 after step S2101 in order to execute steps S2102, S2103, S2105, ..., when YES is replied.

Also, although the flowchart shown in Fig. 21 is
20 used in description, the means for executing the processes shown in Fig. 21 is of course provided to each component shown in Fig. 20.

Also, the above-mentioned embodiment of course can
25 be achieved also by supplying a storage medium which stores a program code for software which realizes the functions of the host computer and its terminals of

each of the above-mentioned embodiments to the system or device so that a computer (or CPU or MPU) of that system or device may read out the program code stored in the storage medium and execute it.

5 In this case, the program code itself read out from the storage medium realizes the functions of each embodiment, so that the storage medium which stores that program code constitutes the present invention.

10 The storage medium for supplying a program code may come in a ROM, floppy disk, hard disk, optical disk, magneto-optical disk, CD-ROM, CD-R, magnetic tape, nonvolatile memory card, etc.

15 Also, by executing a program code read out by the computer, the functions of each embodiment not only can be realized but also the OS etc. operating at the computer can execute part or all of the actual processes, of course thereby realizing the functions of each embodiment.

20 Also, after a program code read out from the storage medium is written into a memory provided to a function-expansion unit connected to an expansion-function board inserted into the computer or a function-expansion unit connected to the computer, based on instructions of that program code, the CPU
25 etc. of that function-expansion board or that function-expansion unit may of course execute part of all of the actual processes, thereby realizing the functions of

each embodiment.

As described above, the above-mentioned embodiment detects whether predetermined information (which is indicative of production) in image data when that image data is sent from the user side terminal and to be output from an output device (i.e., image forming device, printer, etc.). If the results of this detection indicate the presence of the production information, the system prohibits the outputting of that image data at the output device. In this case, the system causes the user side terminal to for example display a screen which prompts it to enter a password issued from the author's side or confirm that the concerned image data is production, thereby releasing an output-prohibited state of the above-mentioned image data based on information (i.e., information of the entered password or accounting acceptance) returned from the user side terminal. Alternatively, the system sends that information returned from the user side to the author's side terminal, to release an output-prohibited state of the above-mentioned image data based on that returned information (i.e., information of the results of checking the password etc.).

With this, when the user who asked for the outputting of image data which is production has permission from the author's side, an output-prohibited state of that image data is automatically released,

thus permitting an output device to output it.

Specifically, a device or system which to protect digitized production and prevent its illegal copying, detects production information (i.e., predetermined information) embedded in that image data to prohibit its output can release a printout-prohibited state of the production when it has obtained permission from the author's side, so that it can making switch-over between a copy-permitted state and a copy-prohibited state according to whether it is authorized to output the production image. Also, it can automatically give accounting to an image which is output production and also causes the author's side and the user to confirm that accounting information locally.

Therefore, it is possible to automatically make switch-over between a copy-permitted state and a copy-prohibited state according to the type of production while securely protecting the production.

WHAT IS CLAIMED IS:

1. An image processing apparatus which comprises:
detecting means for detecting information relating
to invisible copyright from image data which is input;
5 and
control means for controlling the print of said
image data according to information relating to said
detected copyright.
- 10 2. The image processing apparatus according to
claim 1, wherein the information relating to said
invisible copyright is digital watermark information.
3. The image processing apparatus according to
15 claim 1, wherein said control means prohibits said
print.
4. The image processing apparatus according to
claim 1, wherein said control means prohibits the
20 output of said image data to a printer which performs
said print.
5. The image processing apparatus according to
claim 1, wherein said control means outputs a control
25 signal which gives said image data to a printer which
performs said print to prohibit the print of said image
data.

6. The image processing apparatus which farther
comprises identifying means for identifying a password
embedded in said image data, wherein said control means
permits the print of an image which corresponds to said
5 image data when the same password as said password is
input.

7. The image processing apparatus according to
claim 1, farther comprising:

10 ID detecting means for detecting ID information in
order to identify said image data from said image data;
inputting means for inputting a password by a
user; and
receiving means for sending said ID information
15 and a password to an author's side device to receive
information of print permission for said image
formation.

8. The mage processing apparatus according to
20 claim 1 which further comprises instructing means for
instructing acceptance for accounting for the print
using said image data to an author's side device,
wherein said control means permits the print of said
image data in response to said instruction.

25

9. An image processing apparatus which comprises:
detecting means for detecting a digital watermark

contained in image data;

obtaining means for obtaining an address of a device which holds a data list relating to said image data from said detected digital watermark information;

5 receiving means for receiving a data list from said device according to said address; and

data receiving means for receiving data selected by a user from said image data list.

10 10. The image processing apparatus according to claim 9, wherein said data is an image, a speech or a movie.

15 11. The image processing apparatus according to claim 9, wherein said data list writes therein a plurality of data pieces and charge for said plurality of data pieces.

20 12. The image processing apparatus according to claim 9, wherein said data reception is performed by selecting user's desired data from said data list and inputting the number of a cash card of said user.

25 13. The image processing apparatus according to claim 9, wherein said data is data of another produce of a painter who has written said image data.

14. The image processing apparatus according to claim 9, wherein said data is data of another produce of a composer who has written a musical note corresponding to said image data.

5

15. The image processing apparatus according to claim 9, wherein said data is data of another produce of an author who has written a book according to said image data.

10

16. The image processing apparatus according to claim 9, wherein said data is data of another produce of an photographer who has taken a photograph corresponding to said image data.

15

17. The image processing apparatus according to claim 9, wherein said address comprises a plurality of addresses and said data receiving means receives a data list from a plurality of devices.

20

18. An image processing method which comprises:
a step of detecting information relating to invisible copyright from input image data by detecting means; and

25

a step of controlling the print of said image data according to information relating to said detected copyright by control means.

19. An image processing method which comprises:

a step of detecting a digital watermark contained in image data by detecting means;

a step of obtaining an address of a device which
5 holds a data list relating to said image data from said
detected digital watermark information by obtaining
means;

a step of receiving a data list from said device according to said address by receiving means; and

10 a step of receiving data selected by a user from
said image data list by data receiving means.

ABSTRACT OF THE DISCLOSURE

The present invention provides an image processing system which can make switch-over between a copy-permitted state and a copy-prohibited state
5 automatically according to the type of production while securely protecting the production.

For the purpose, the system causes a detecting portion to detect the presence of predetermined information (i.e., production information) in image
10 data, when that image data is sent from a user side terminal to be output from an output device. If the results of this detection indicate its presence, the system prohibits outputting of that image data from the output device. With this, the system releases an
15 output-prohibited state of the above-mentioned image data based on the results of comparison between a password sent from the user side terminal and a password present in that image data.

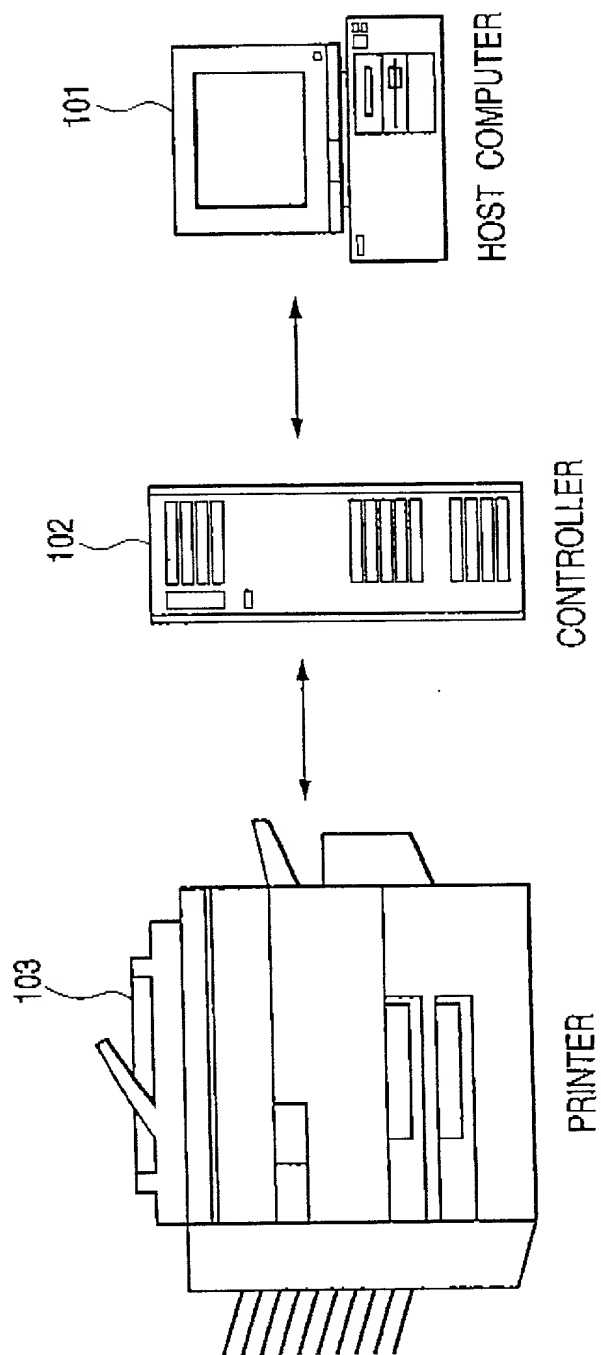


FIG. 1

FIG. 2

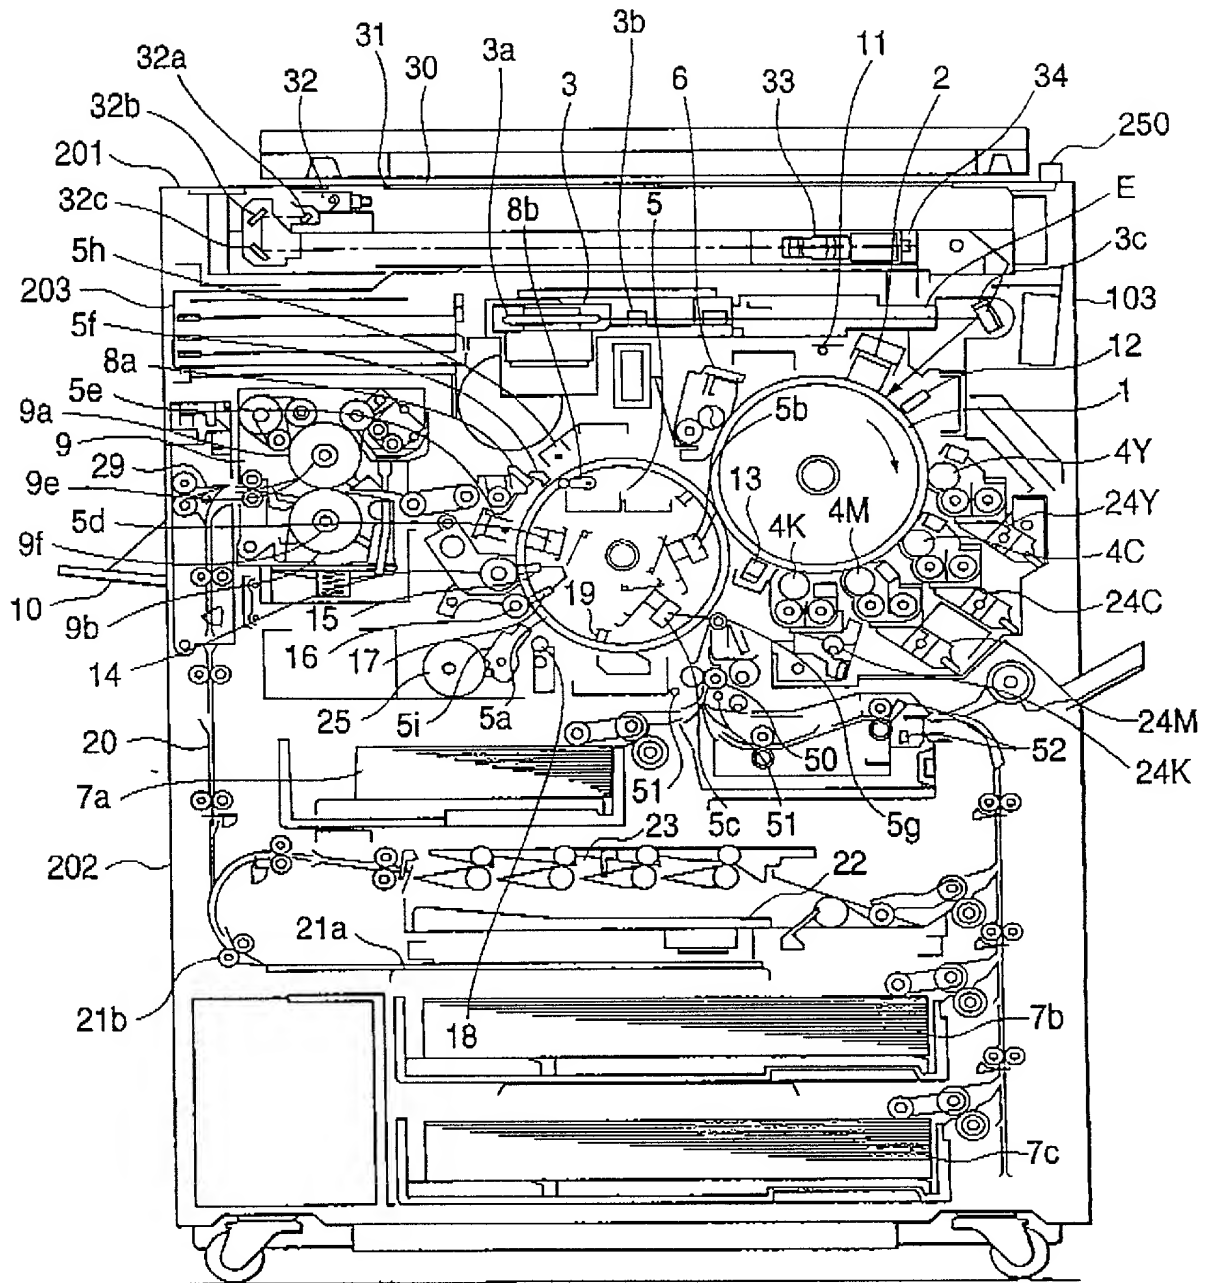


FIG. 3

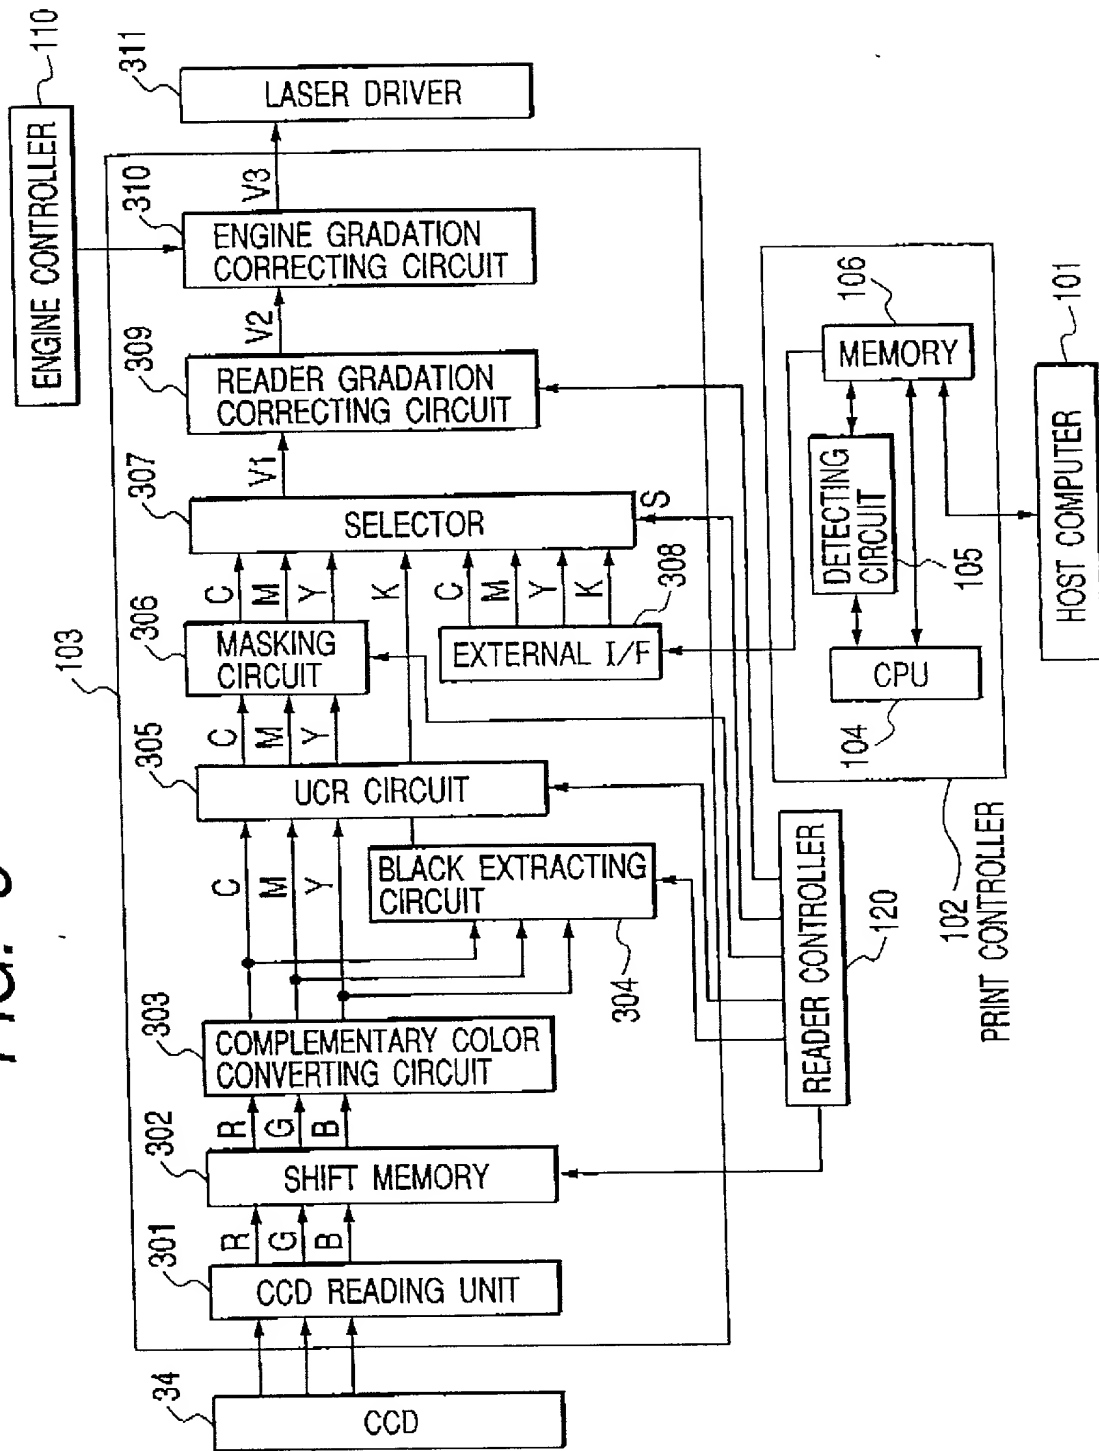


FIG. 4

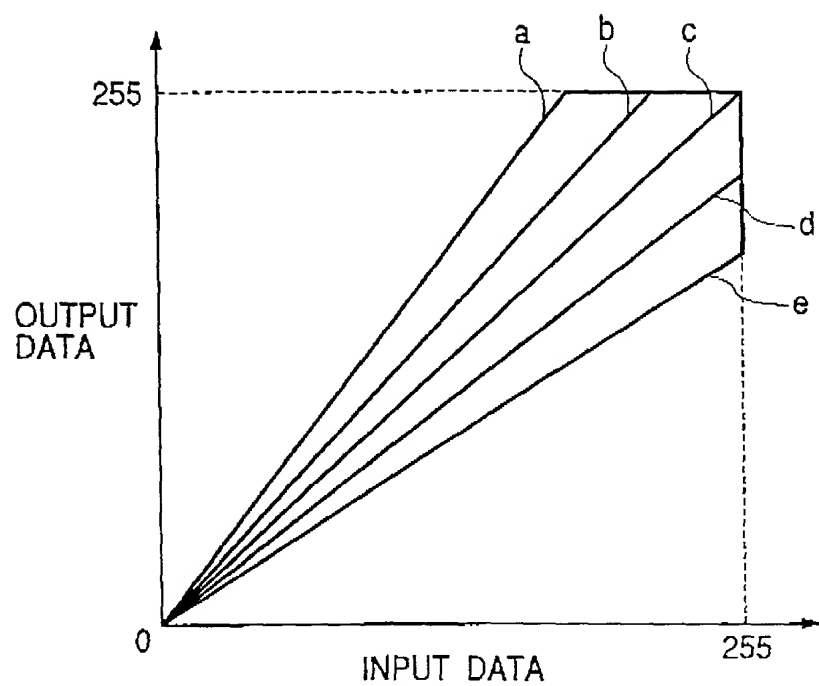


FIG. 5

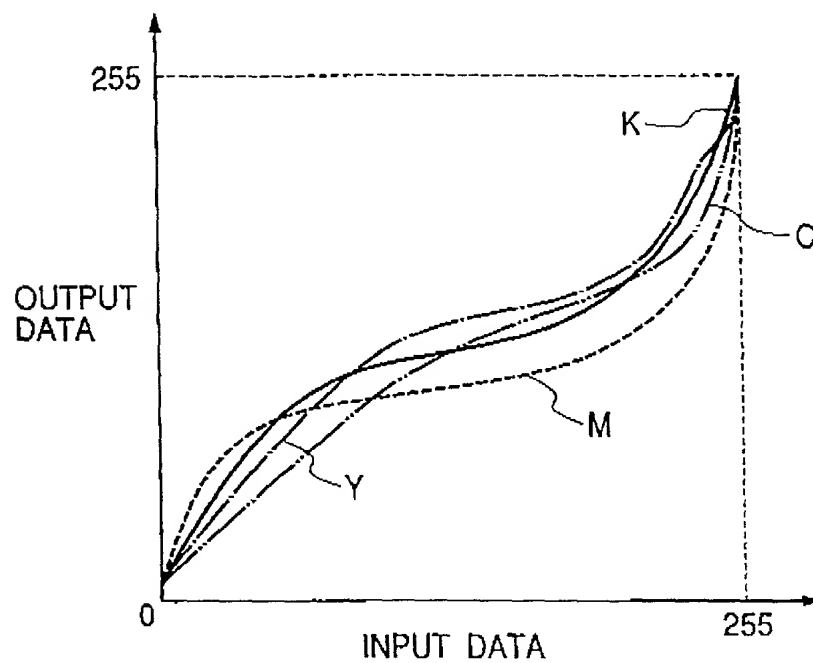


FIG. 6

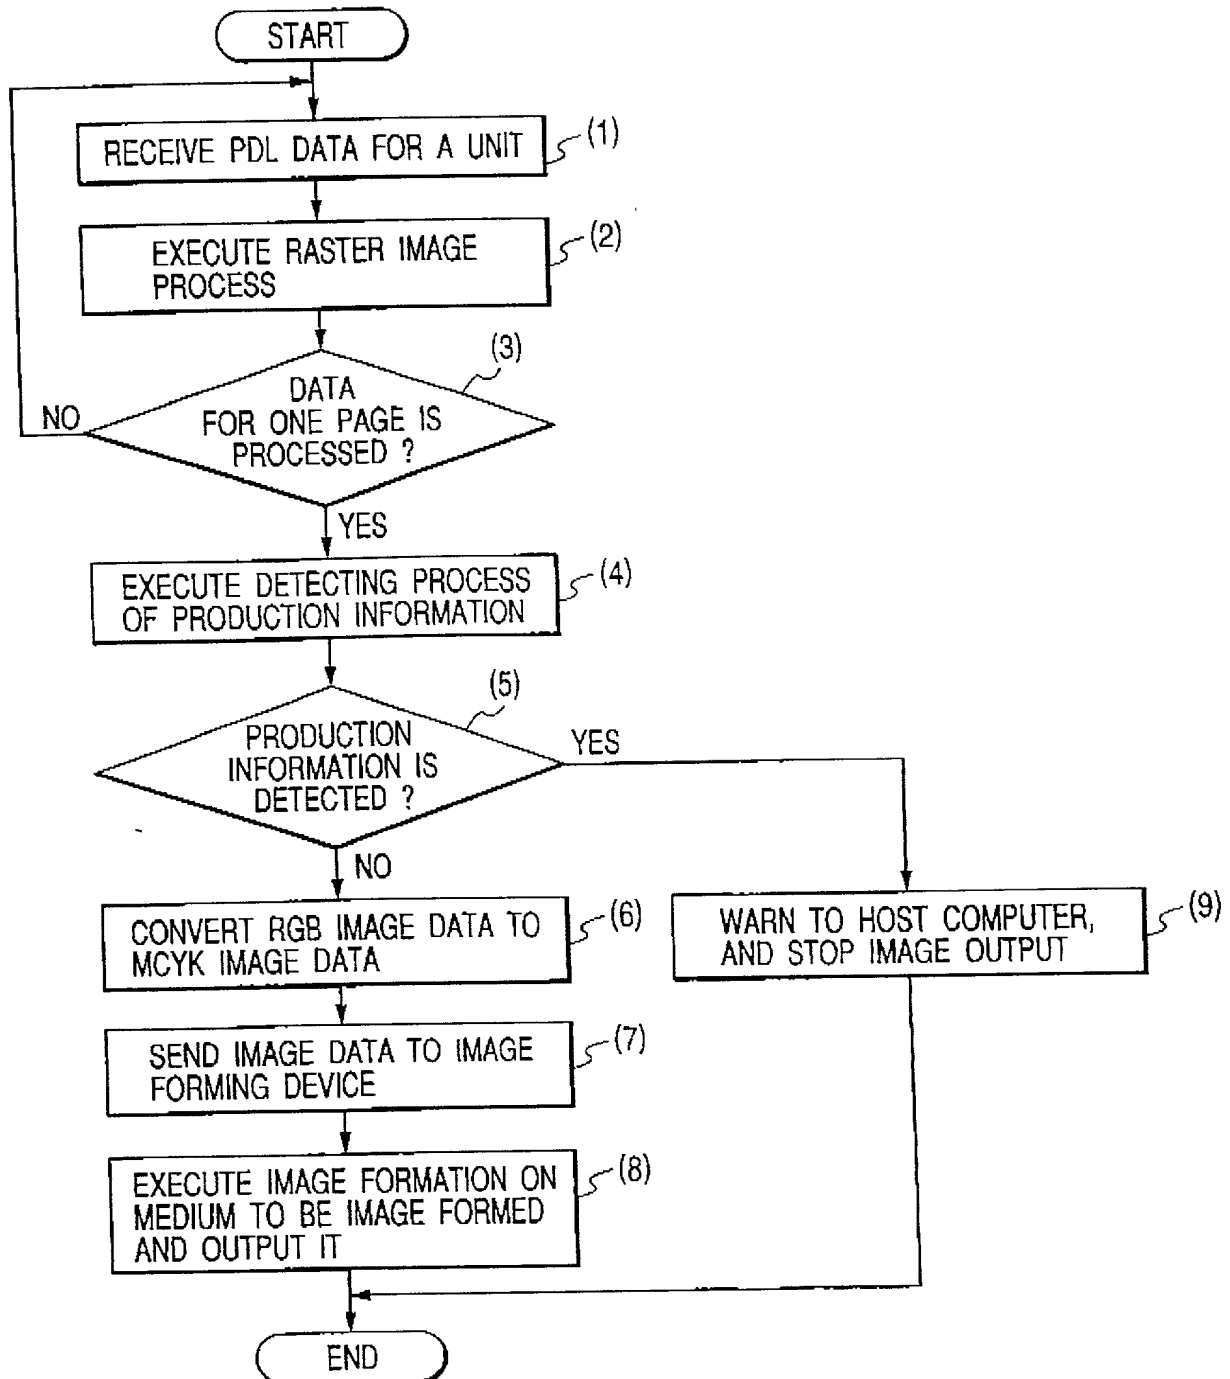


FIG. 7A



FIG. 7B




FIG. 7C




FIG. 7D



FIG. 7E

THIS IMAGE CAN NOT COPIED BECAUSE OF PRODUCTION

FIG. 8A

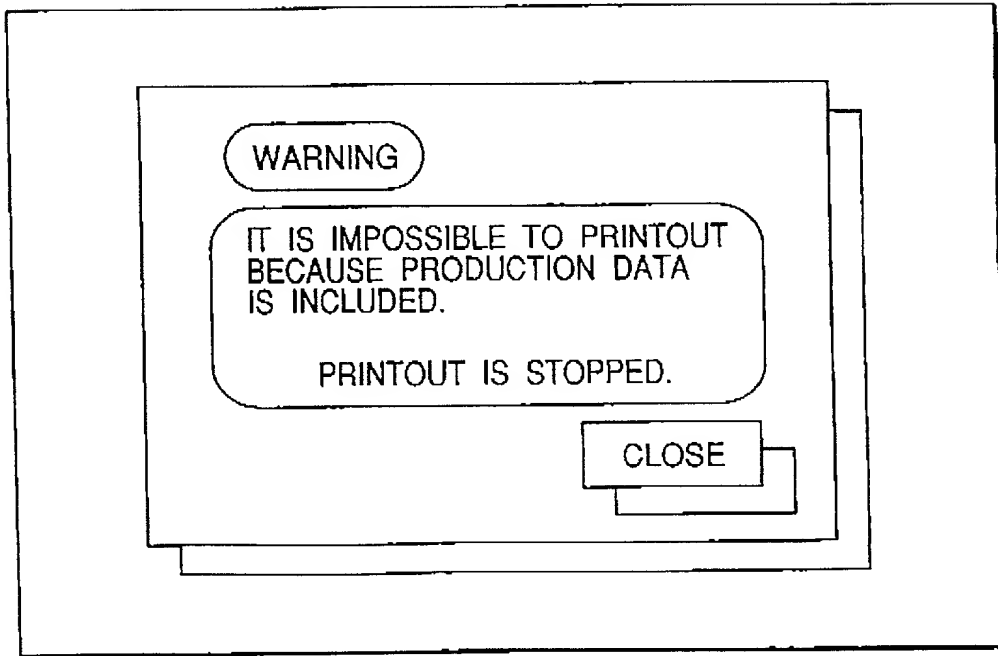


FIG. 8B

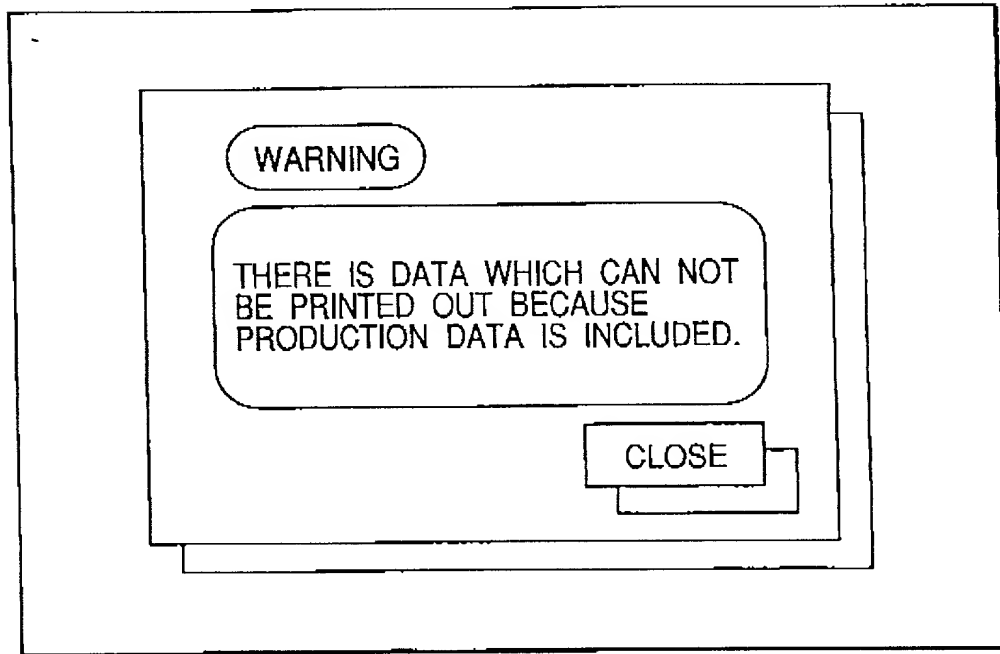


FIG. 9

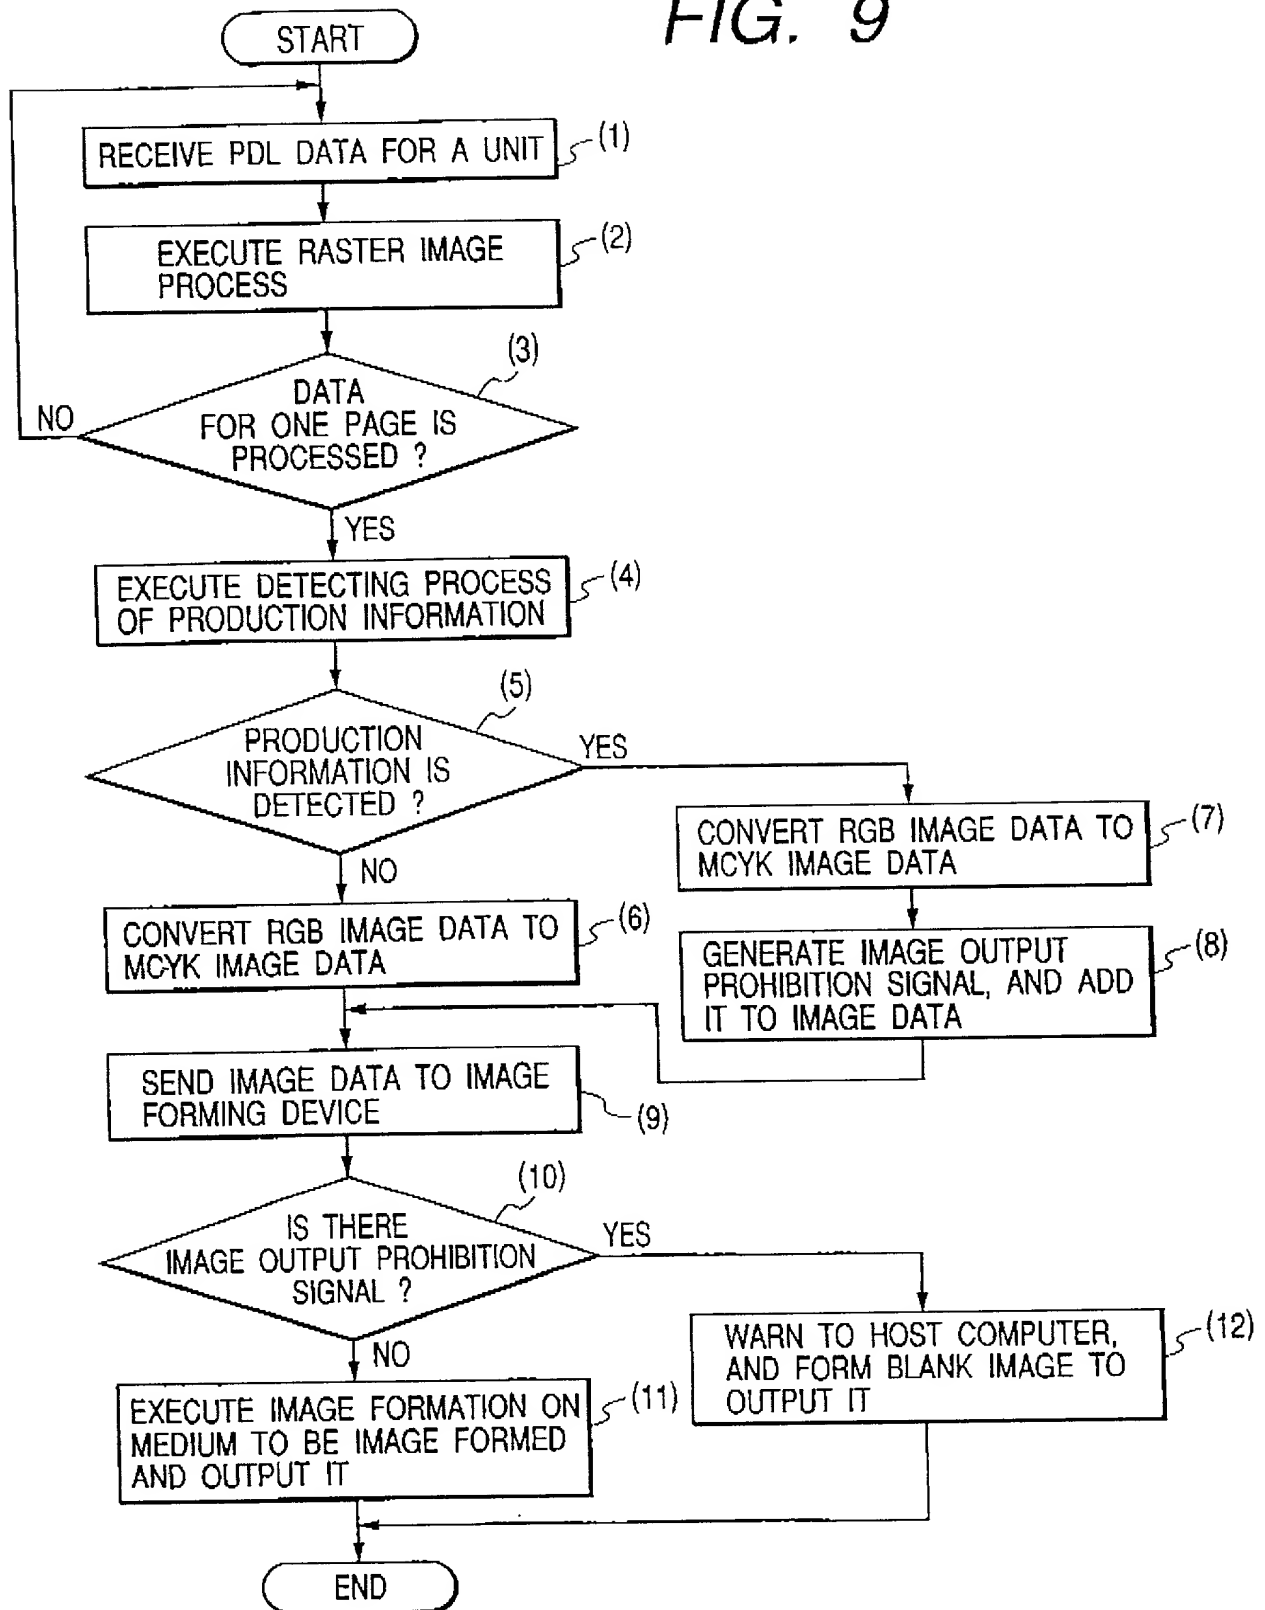


FIG. 10

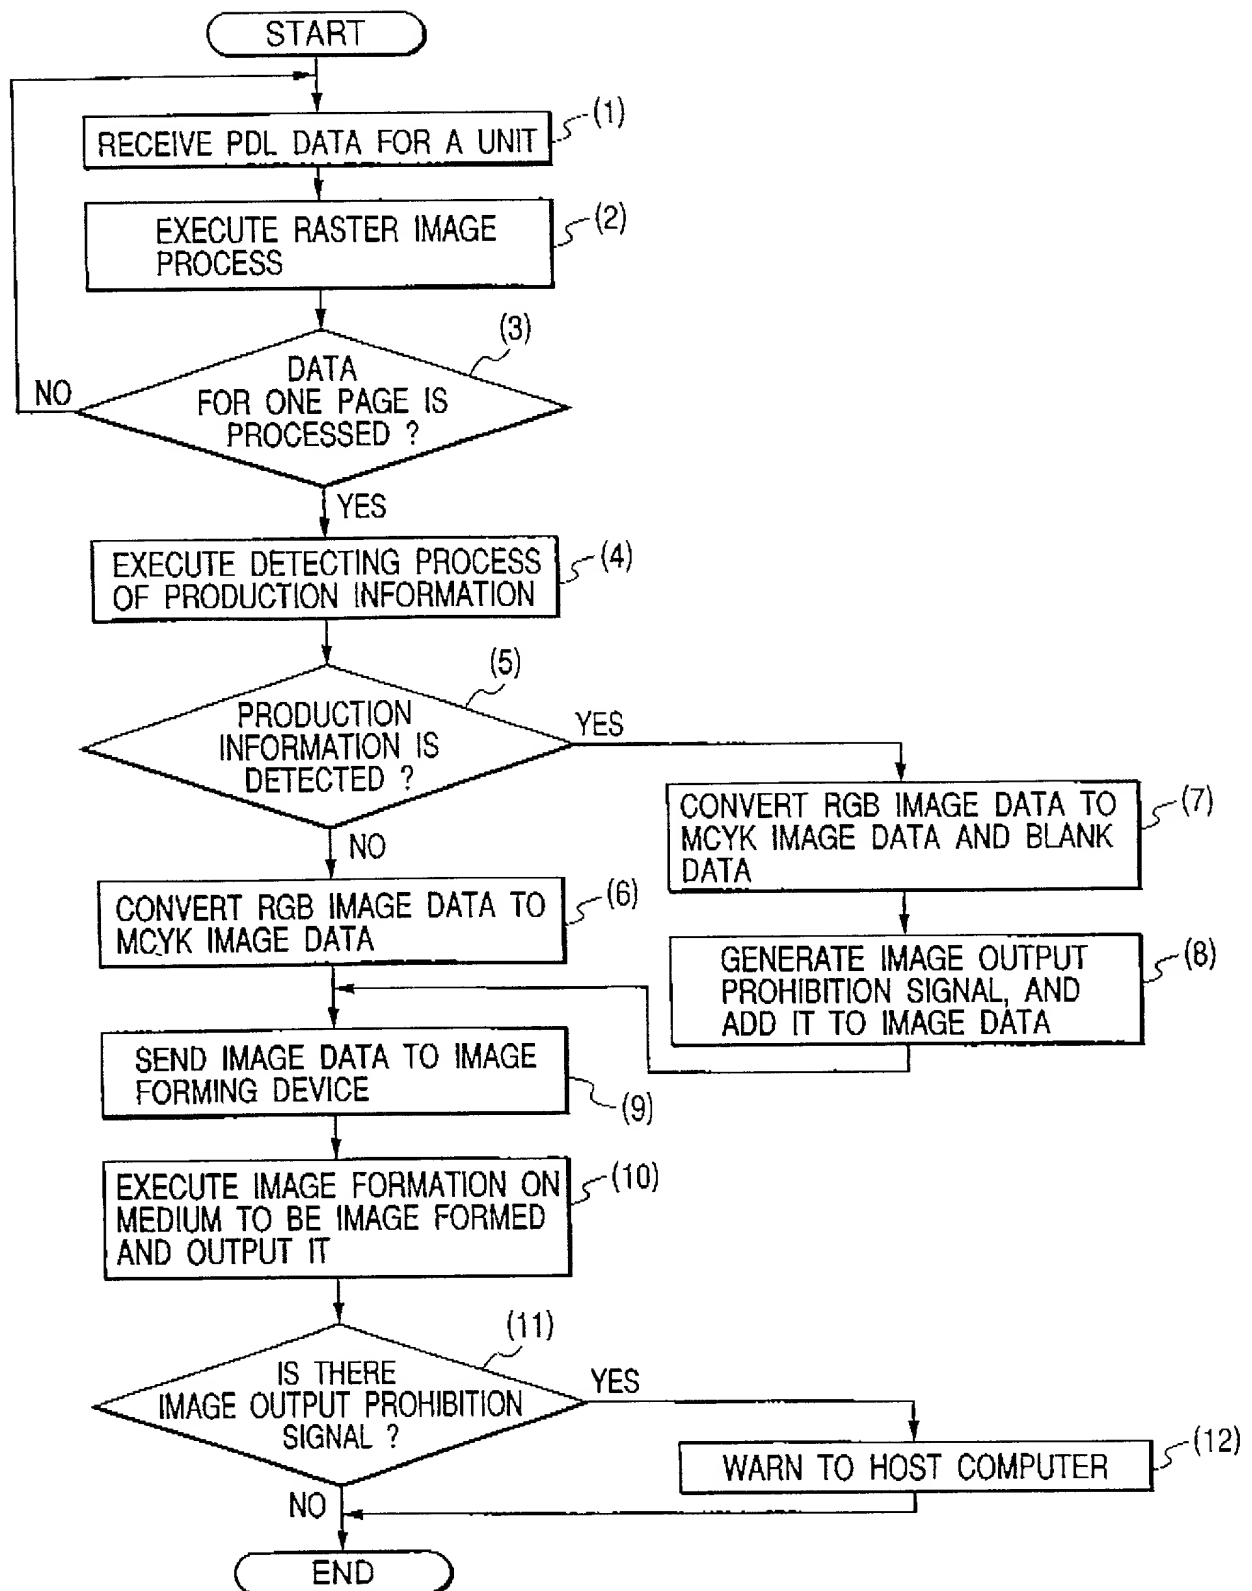


FIG. 11

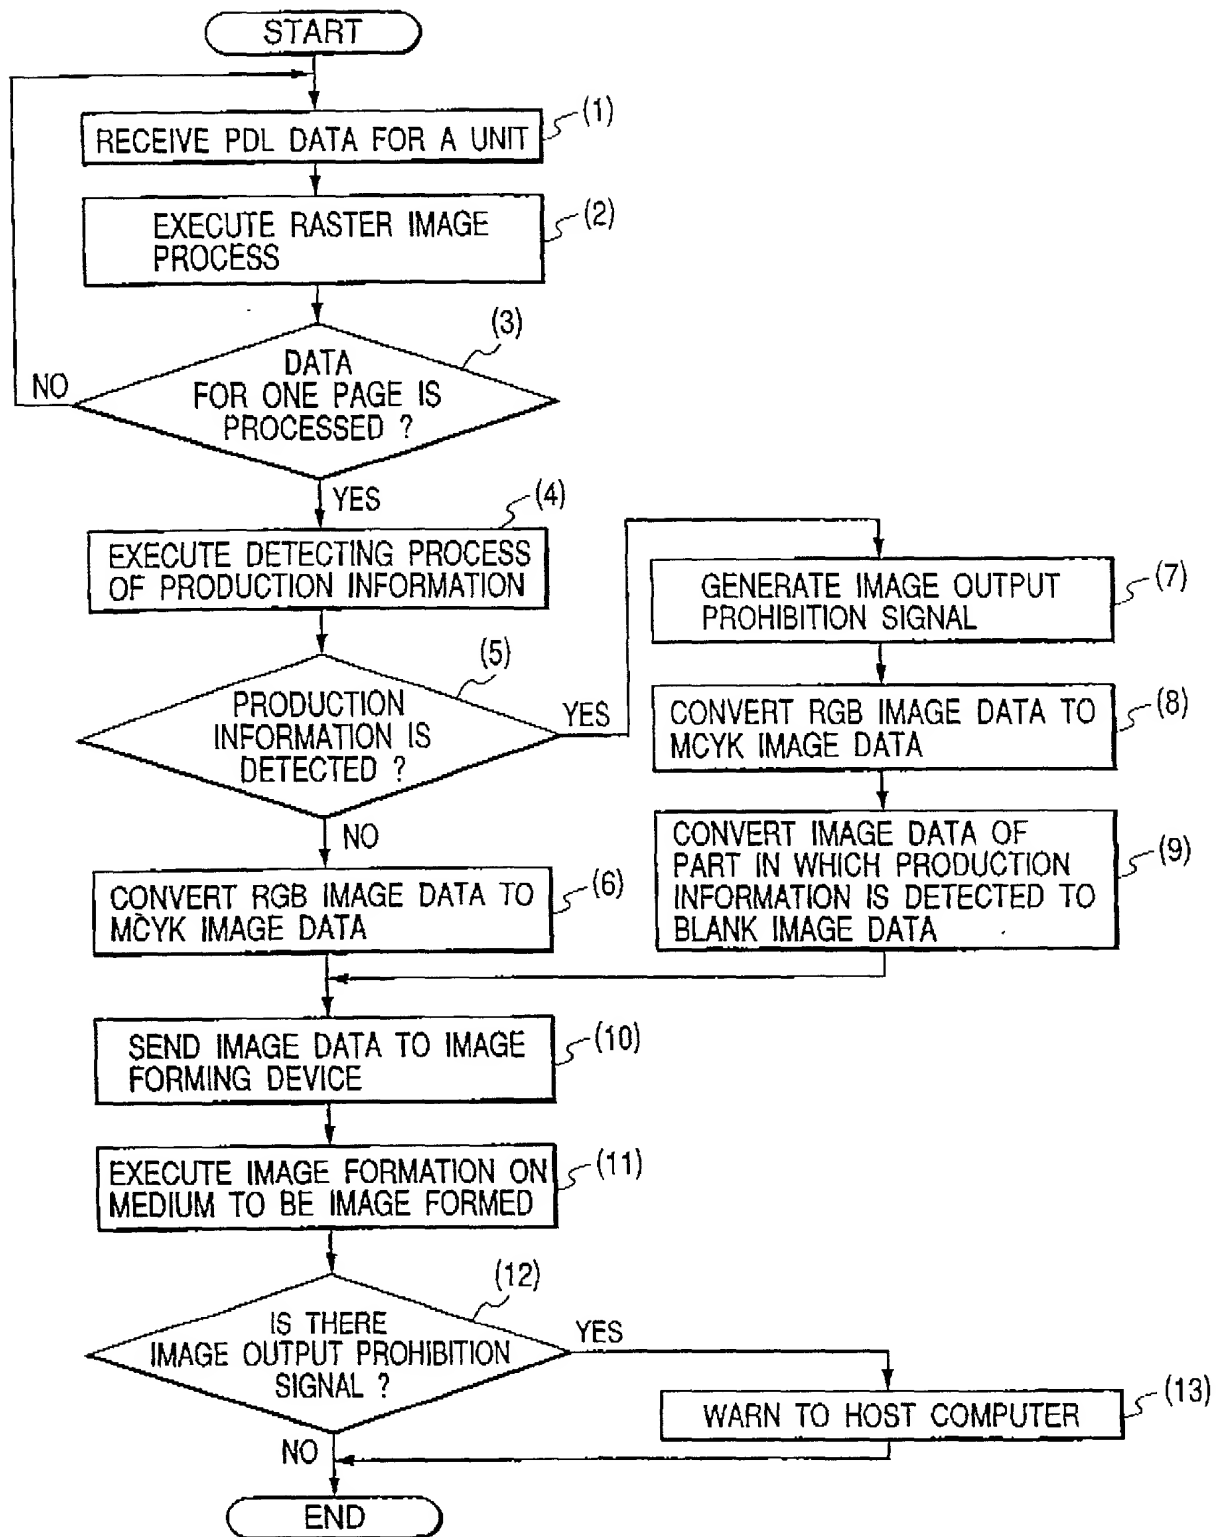


FIG. 12

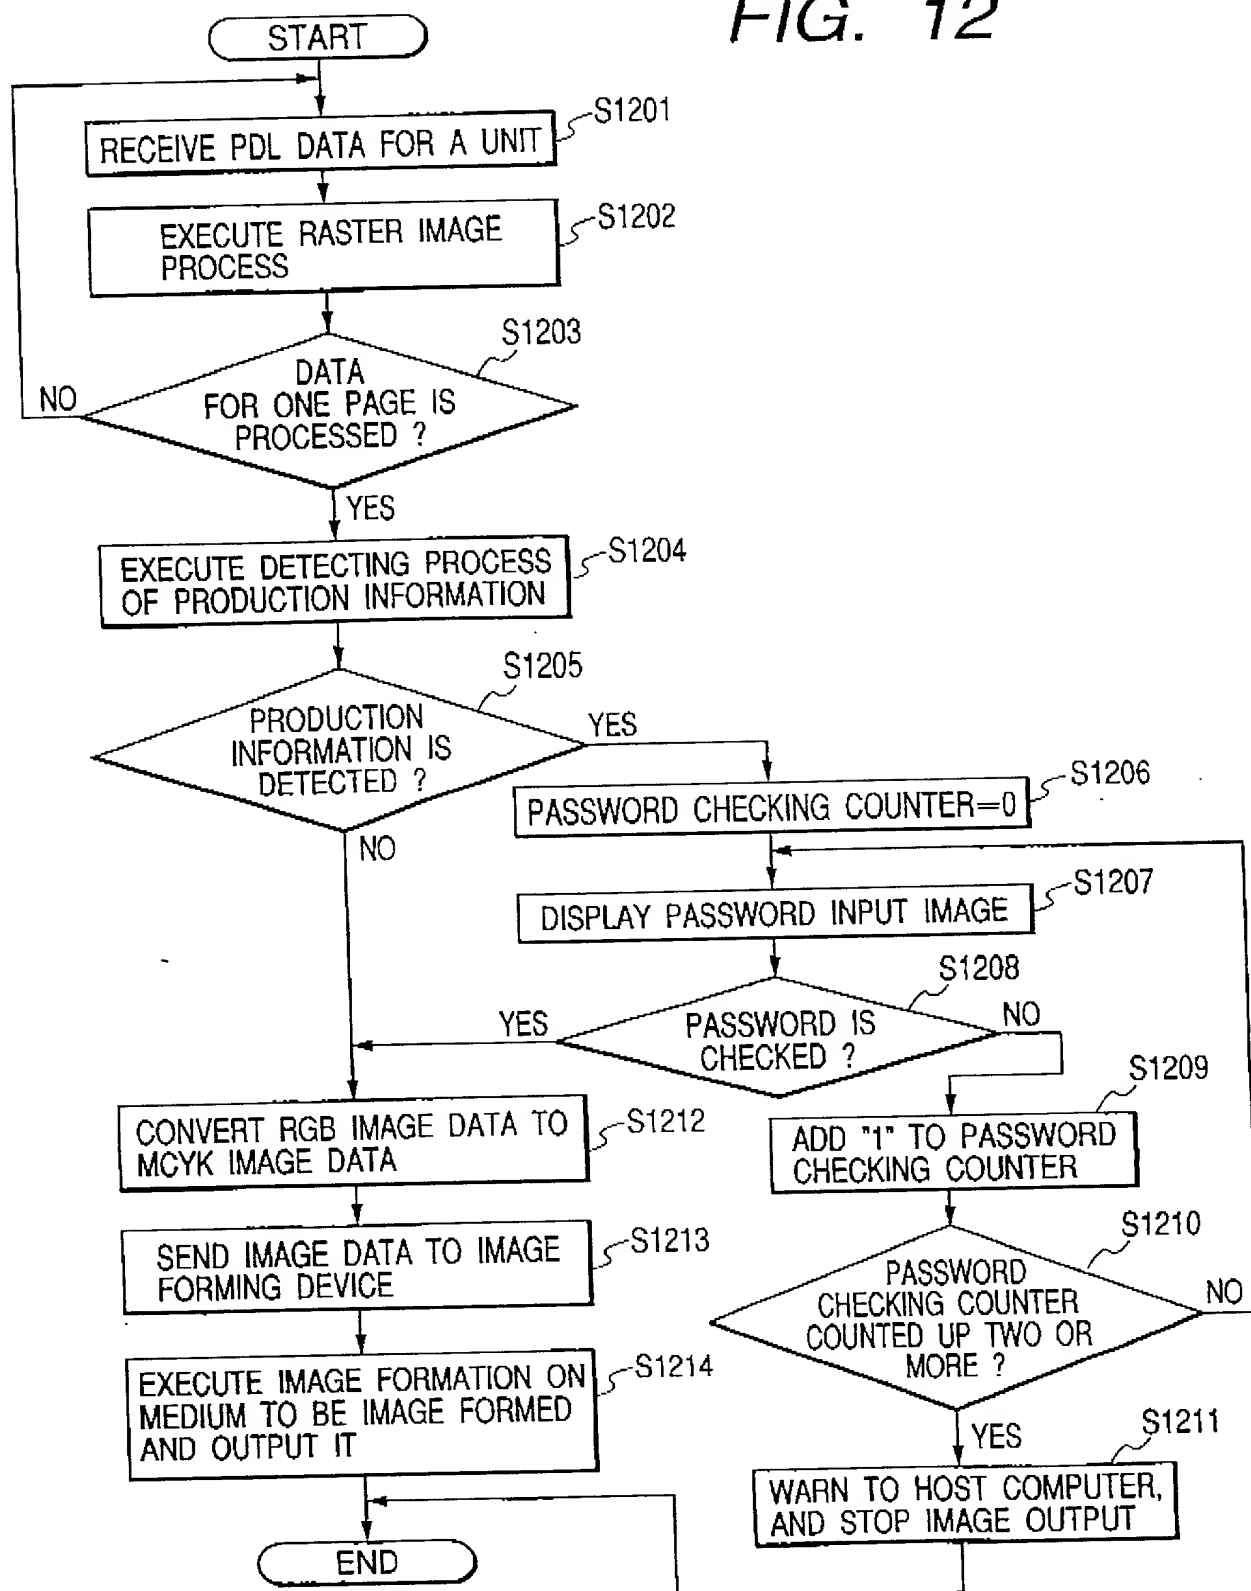


FIG. 13A

A rectangular dialog box with a double border. Inside, at the top, is a rounded rectangle containing the word "WARNING". Below this is a larger rounded rectangle containing the text "PASSWORD IS NECESSARY TO PRINTOUT BECAUSE OF PRODUCTION DATA IS INCLUDED." followed by "PLEASE INPUT PASSWORD OF 10 DIGITS." At the bottom of the dialog box, there is a horizontal input field with a vertical cursor on the left, and a rectangular button labeled "OK" to its right.

WARNING

PASSWORD IS NECESSARY TO
PRINTOUT BECAUSE OF
PRODUCTION DATA IS INCLUDED.

PLEASE INPUT PASSWORD OF 10
DIGITS.

|

OK

FIG. 13B

A rectangular dialog box with a double border. Inside, at the top, is a rounded rectangle containing the word "WARNING". Below this is a larger rounded rectangle containing the text "PRINTOUT CAN NOT BE EXECUTED BECAUSE PASSWORD DOES NOT MATCH." followed by "PRINTOUT FINISHED." At the bottom right of the dialog box, there is a rectangular button labeled "CLOSE".

WARNING

PRINTOUT CAN NOT BE
EXECUTED BECAUSE PASSWORD
DOES NOT MATCH.

PRINTOUT FINISHED.

CLOSE

FIG. 14A FIG. 14B FIG. 14C FIG. 14D







FIG. 14E

9218576630194923

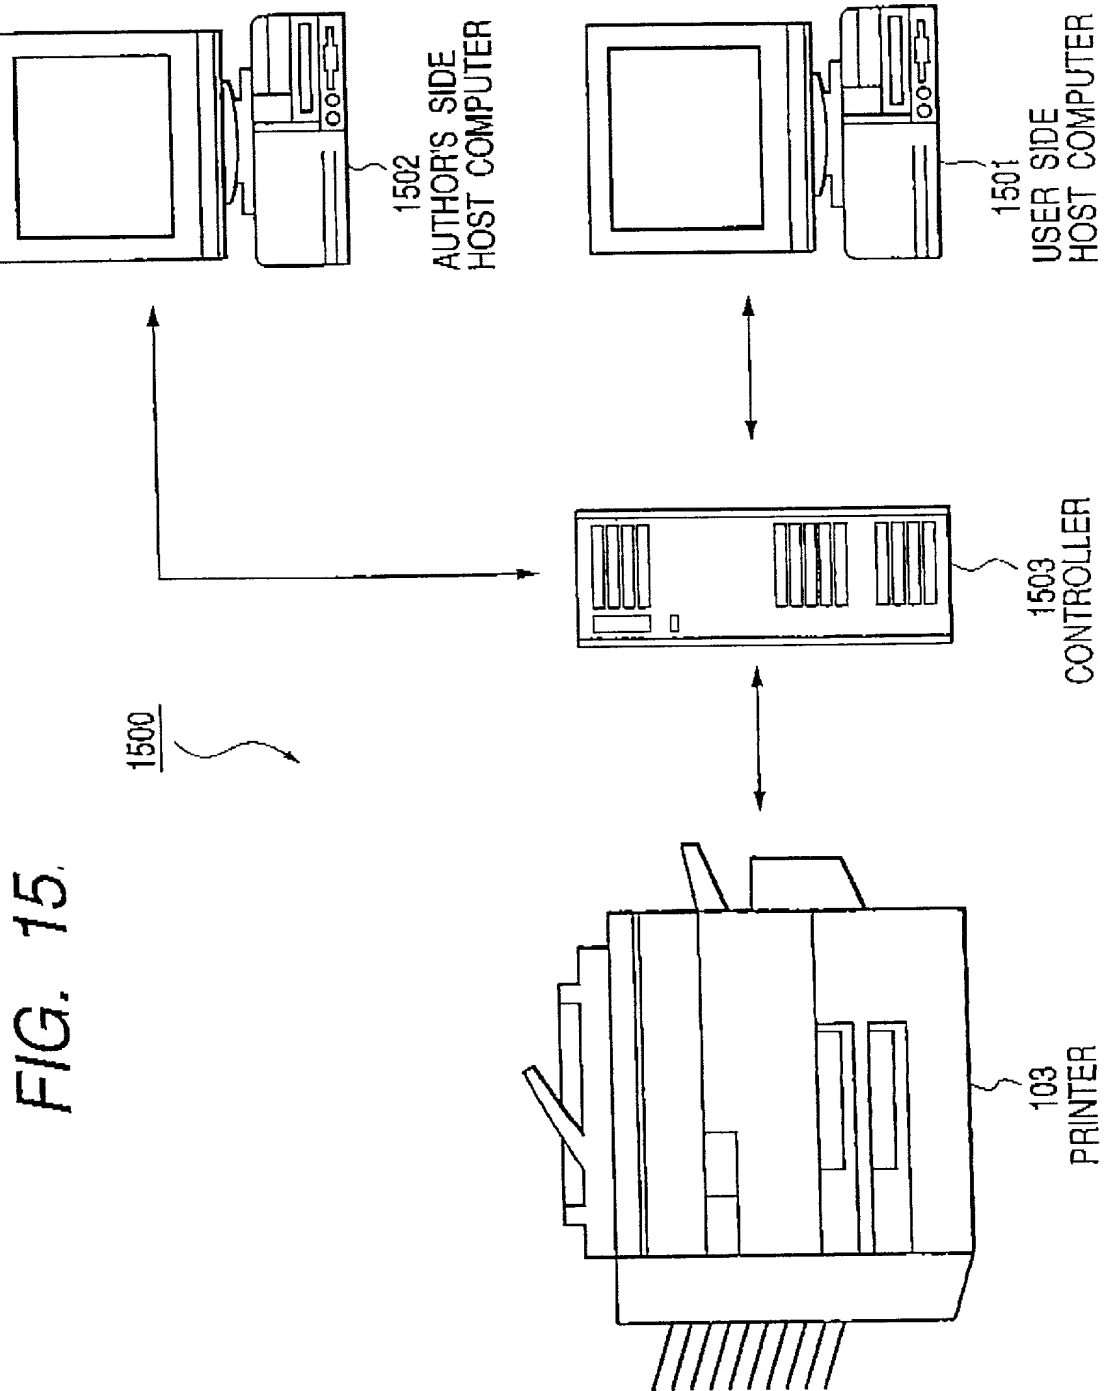


FIG. 16

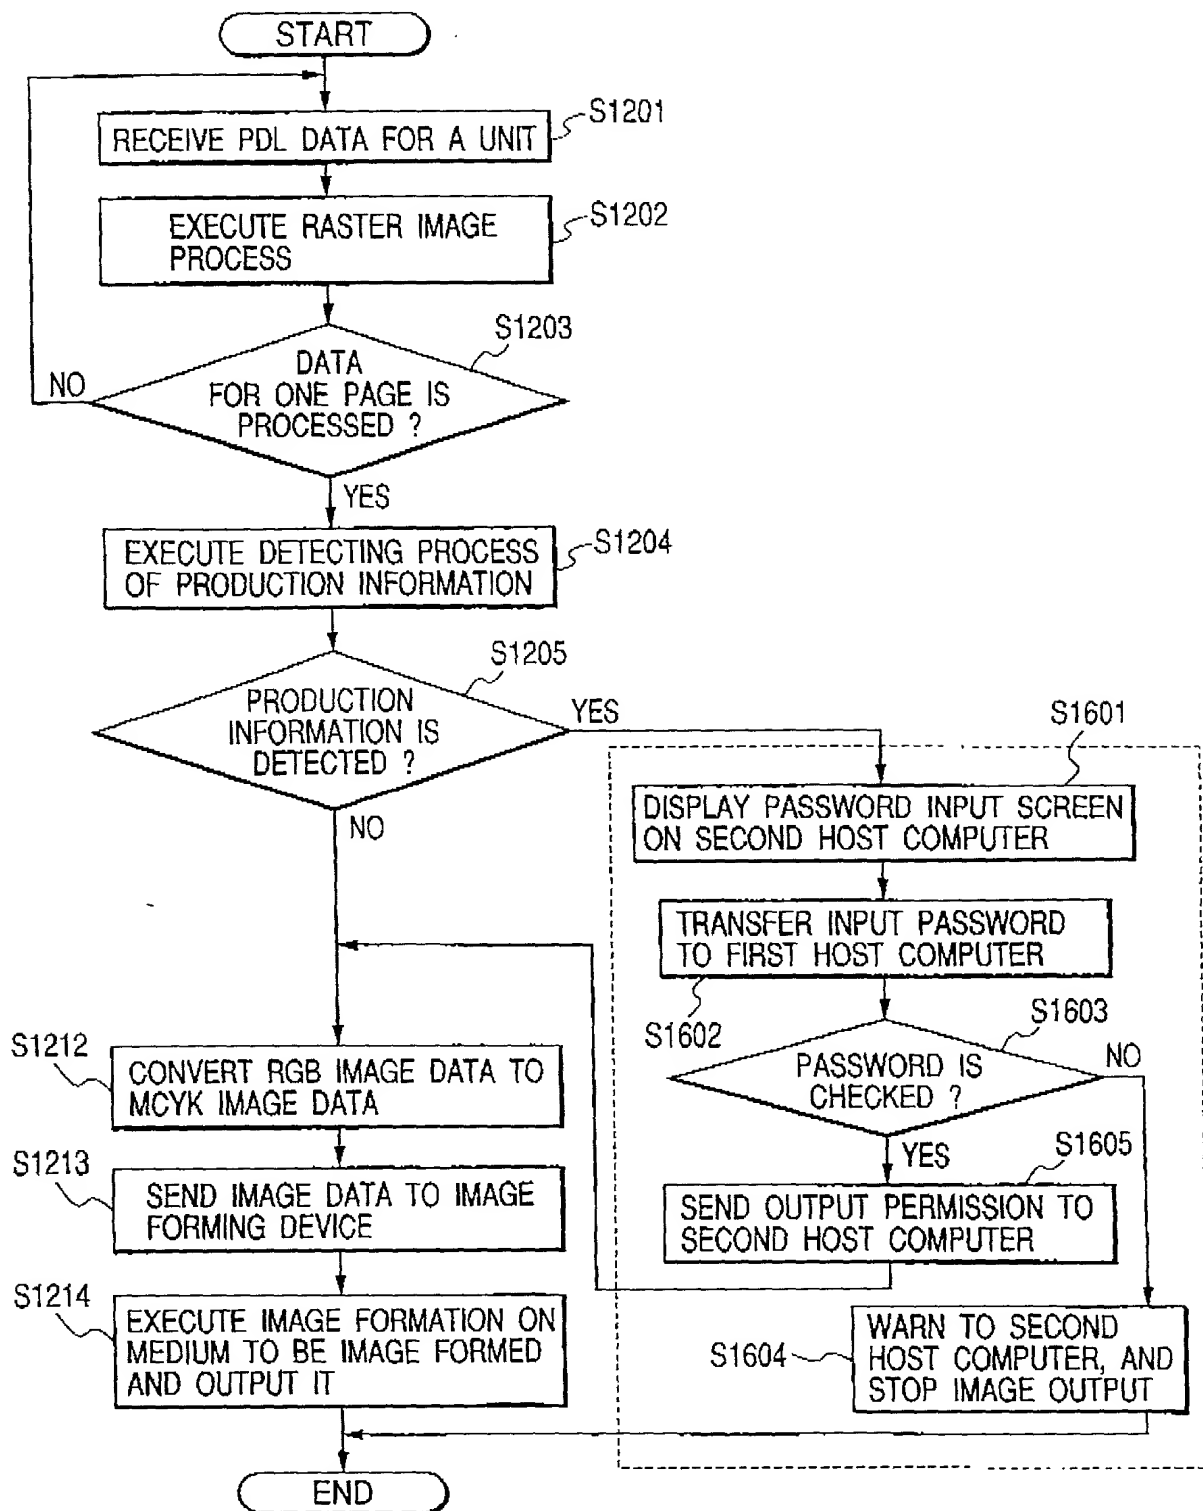


FIG. 17

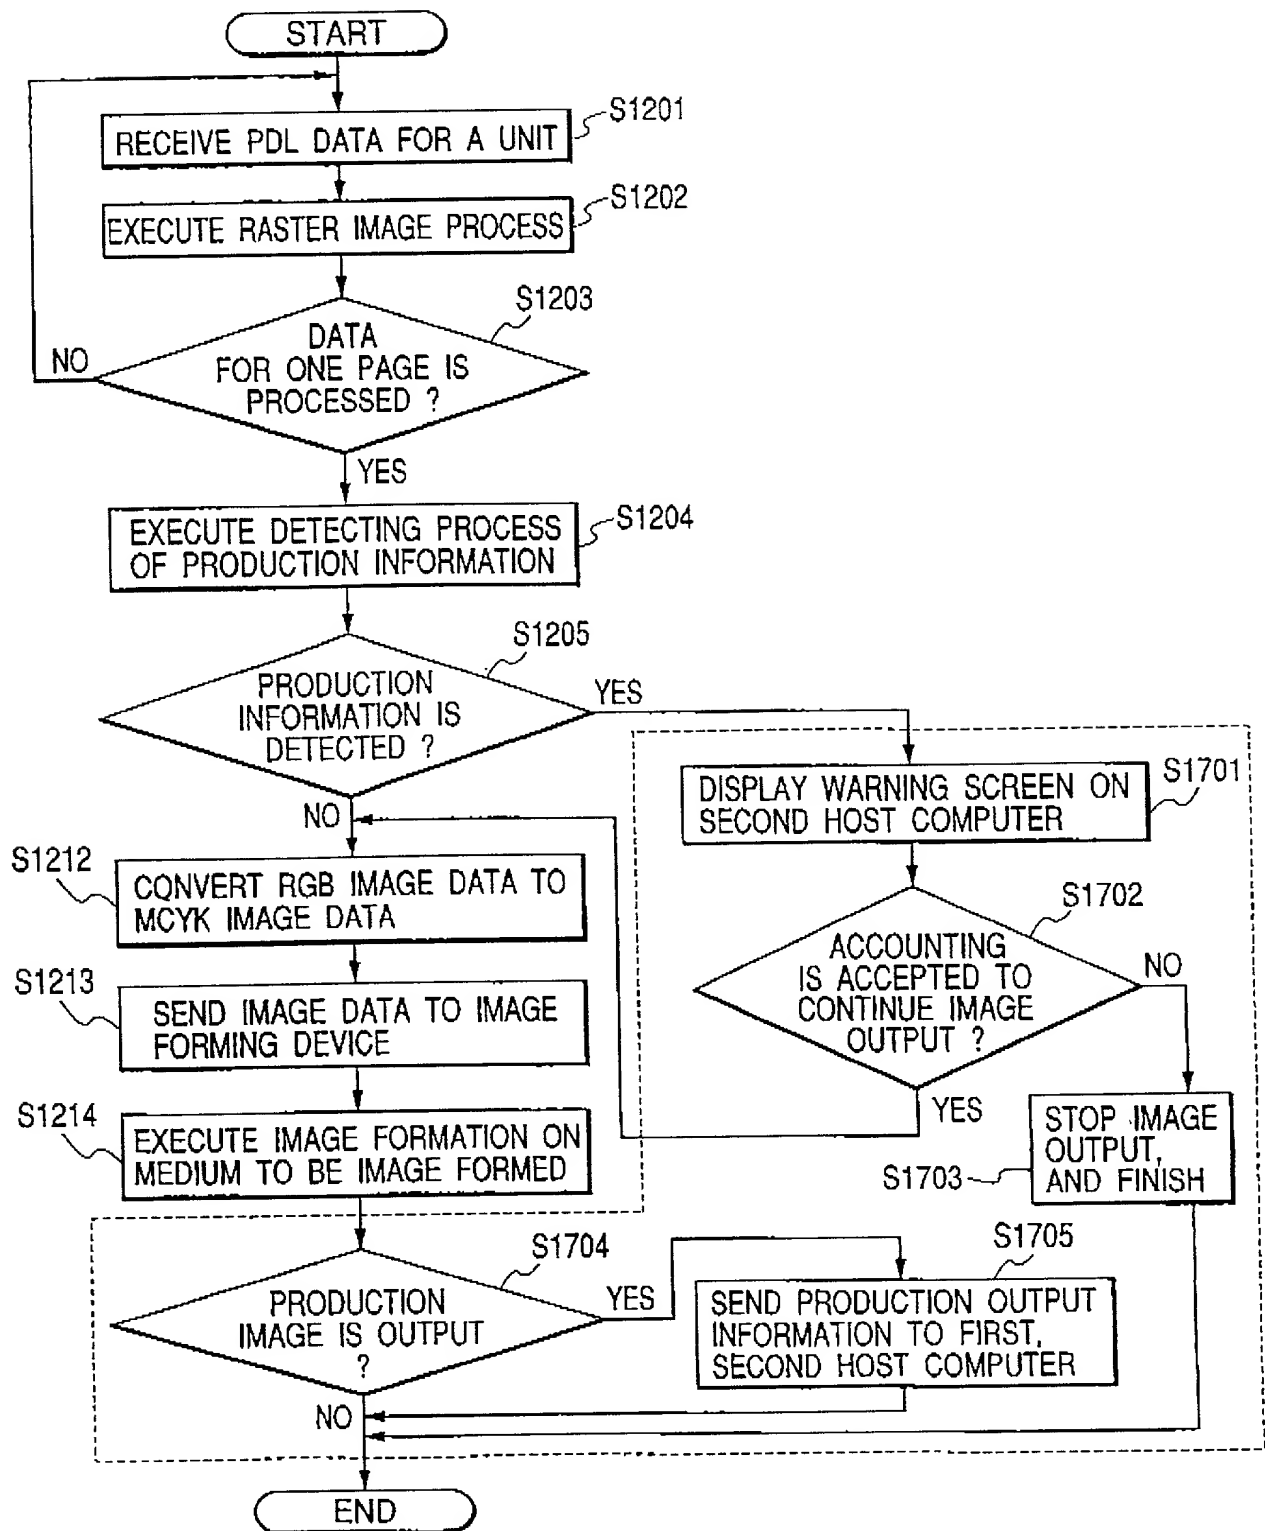


FIG. 18

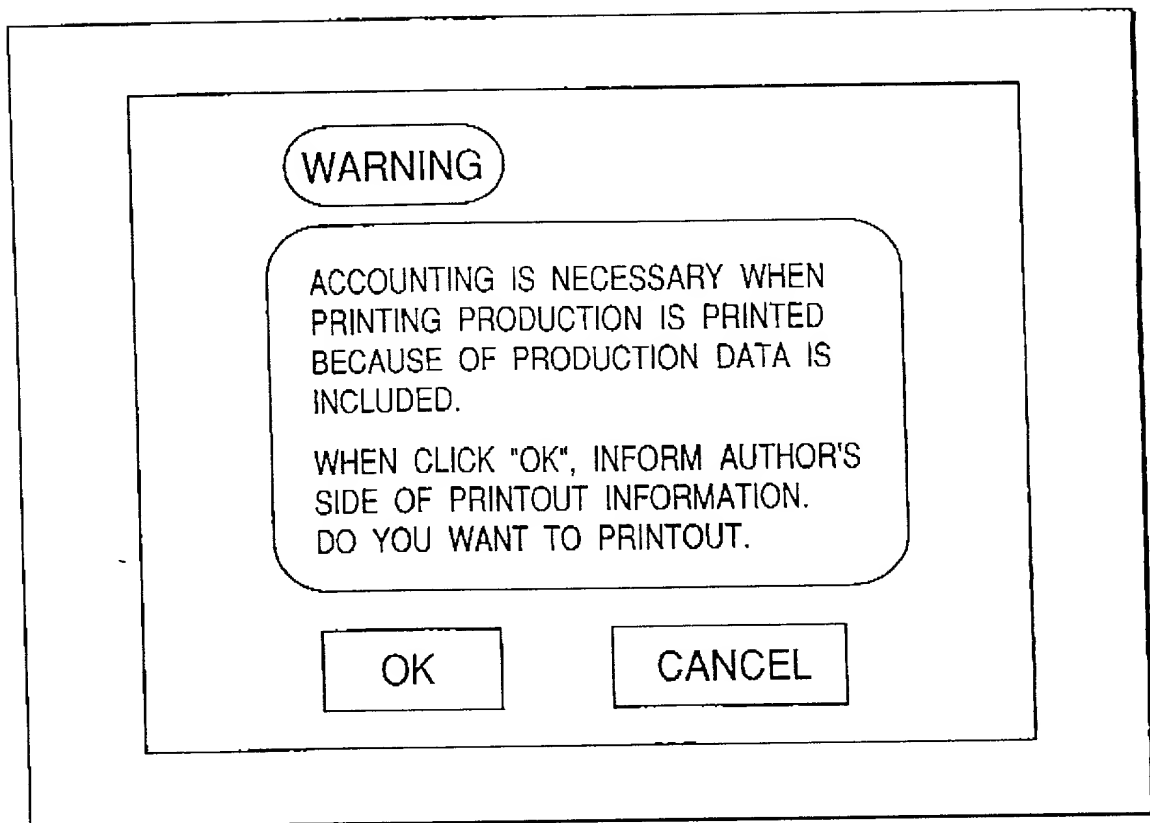


FIG. 19A

PRODUCTION USE INFORMATION

PRODUCTION IS USED AS FOLLOWS
USER=03xxxxxxxx

| PRODUCTION NUMBER | NUMBER OF USE | USE TIME |
|----------------------|------------------|-------------------|
| 2673425570 | 4 | 97/12/12 14:22:03 |
| 3112900652 | 8 | 97/12/12 15:58:22 |
| 9002653489 | 2 | 97/12/12 22:02:17 |

OK

FIG. 19B

PRODUCTION USE INFORMATION

PRODUCTION IS USED AS FOLLOWS
USER=03xxxxxxxx

| PRODUCTION NUMBER | NUMBER | USE TIME | AMOUNT |
|----------------------|--------|-------------------|--------|
| 2673425570 | 4 | 97/12/12 14:22:03 | ¥ 400 |
| 3112900652 | 8 | 97/12/12 15:58:22 | ¥ 1200 |
| 9002653489 | 2 | 97/12/12 22:02:17 | ¥ 300 |

CLOSE

FIG. 20

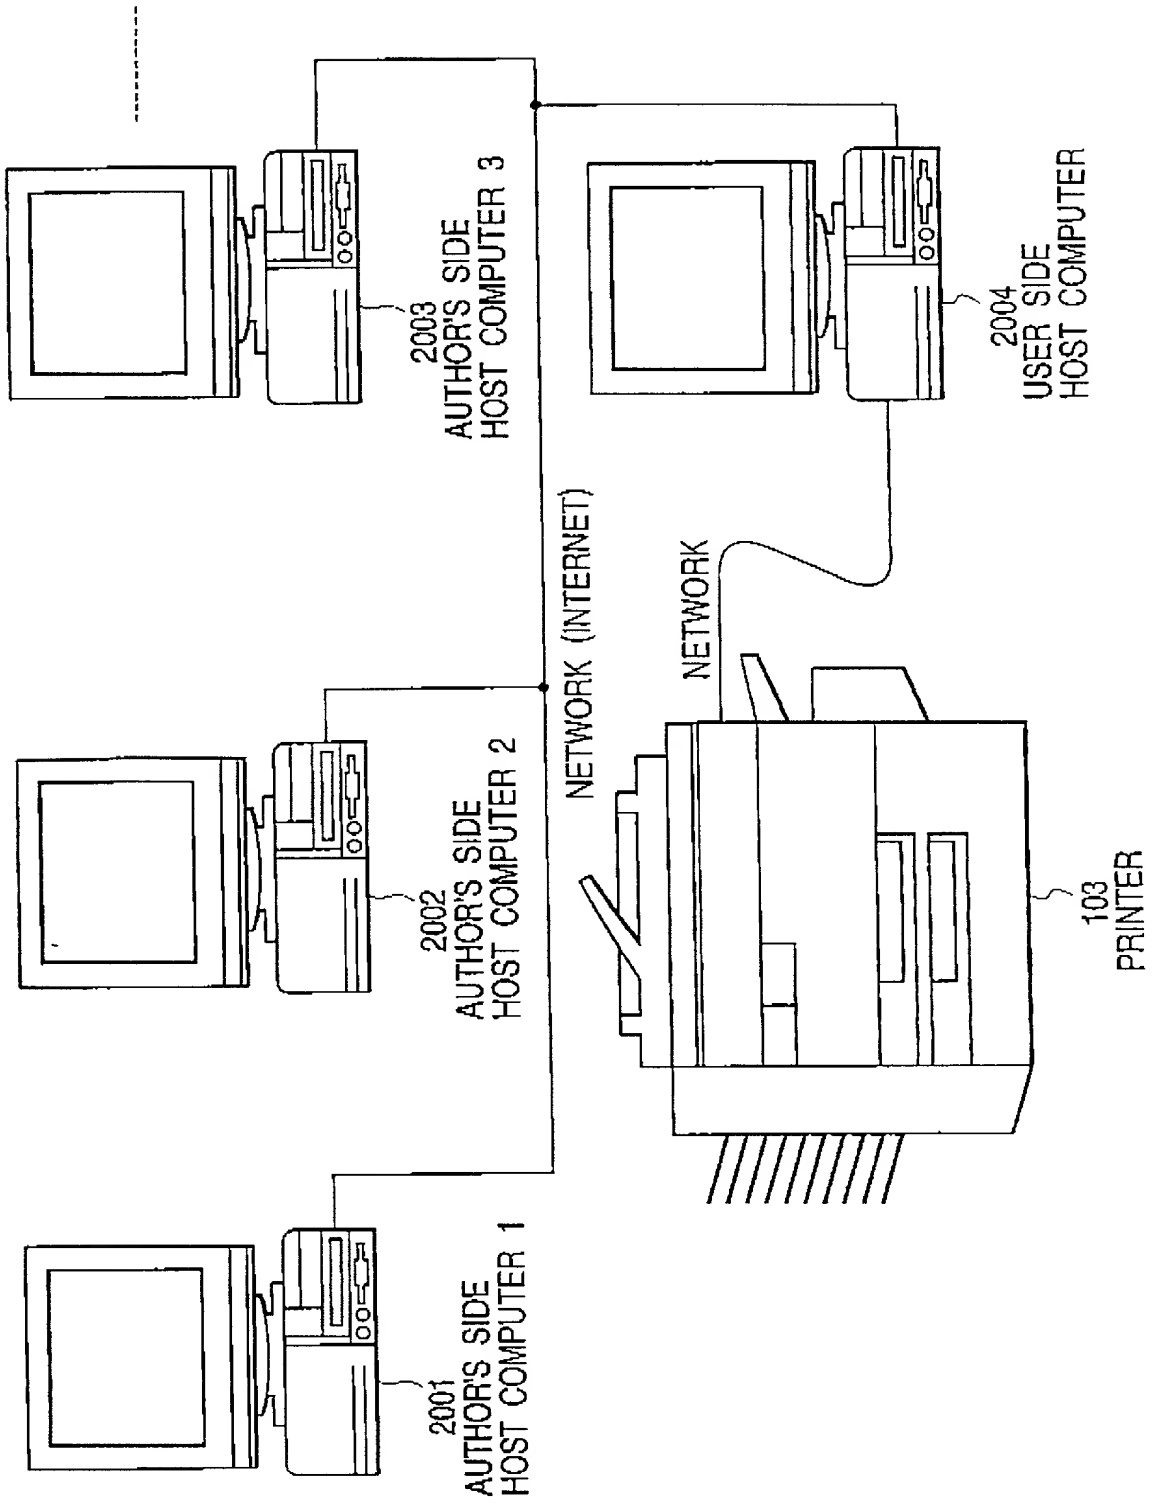


FIG. 21

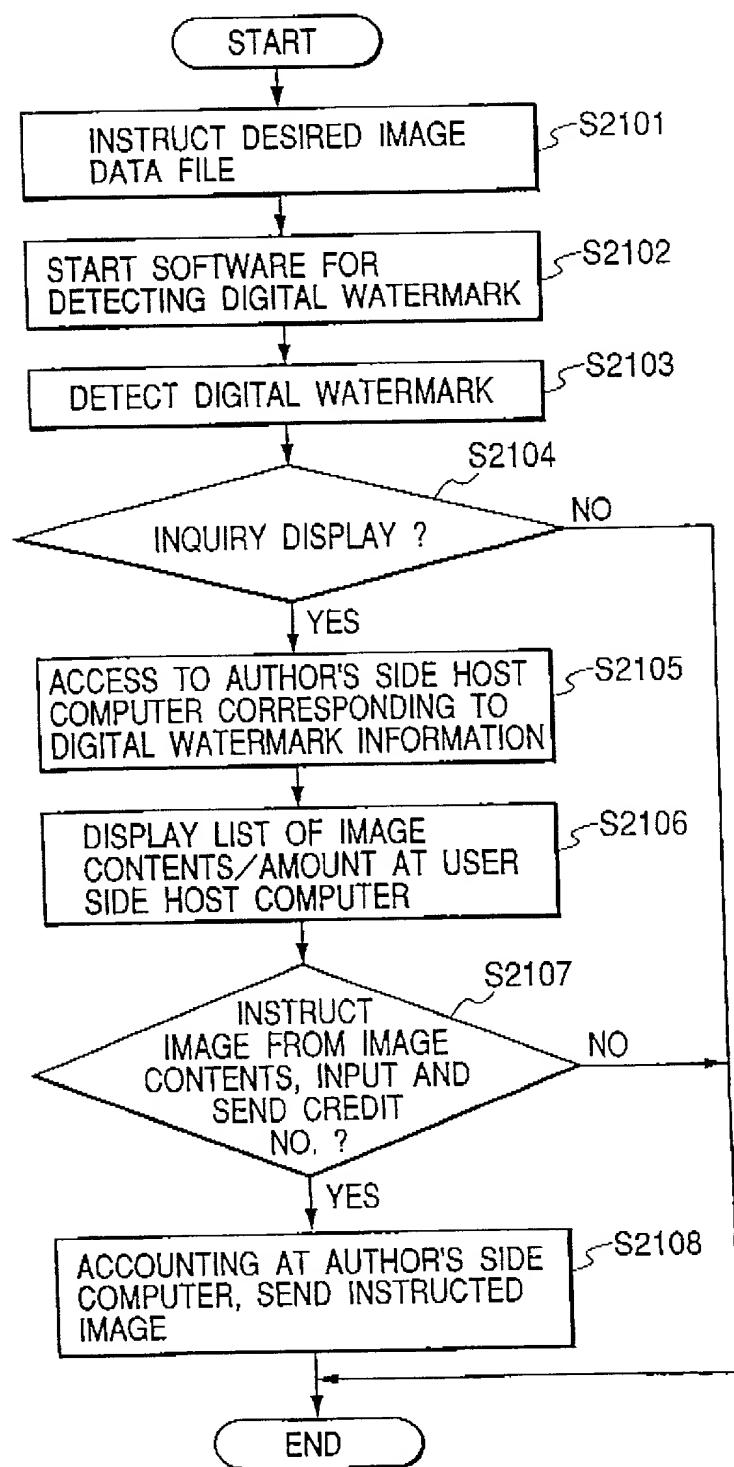


FIG. 22

DO YOU WANT IMAGES RELATING
TO DETECTED IMAGE DATA WHICH
YOU WANT TO PRINT ?

☐ YES ☐ NO

FIG. 23

| IMAGE NAME ○ ○ ○ | | |
|---|-----------------|--------|
| PRODUCE NUMBER | PRODUCE NAME | AMOUNT |
| 1. | _____ | ¥ 000 |
| 2. | _____ | ¥ 000 |
| ⋮ | | |
| CREDIT CARD NO. _____ | | |
| <input type="radio"/> SEND <input type="radio"/> STOP | | |

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled IMAGE PROCESSING APPARATUS, DATA PROCESSING METHOD, AND STORAGE MEDIUM

the specification of which ☒ is attached hereto ☐ was filed on _____ as United States Application No. or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

| Country | Application No. | Filed (Day/Mo./Yr.) | (Yes/No) Priority Claimed |
|---------|-----------------|---------------------|------------------------------|
| JAPAN | 10-337257 | 27/NOVEMBER/1998 | Yes |
| JAPAN | 10-374396 | 28/DECEMBER/1998 | Yes |

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

| Application No. | Filed (Day/Mo./Yr.) | Status (Patented, Pending, Abandoned) |
|-----------------|---------------------|---------------------------------------|
|-----------------|---------------------|---------------------------------------|

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor AKIHIKO SATO

Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 827-1-102, Ooka, Numazu-shi, Shizuoka-ken, JAPAN

Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan